

通过 **ISO9001:2000**
质量管理体系认证



JINTAI SLIDE BEARING


湖南锦泰五金机电有限公司

Hunan Jintai Hardware and Machinery Co., LTD



JINTAI SLIDE BEARING INTRODUCTION

COMPANY & CERTIFICATES

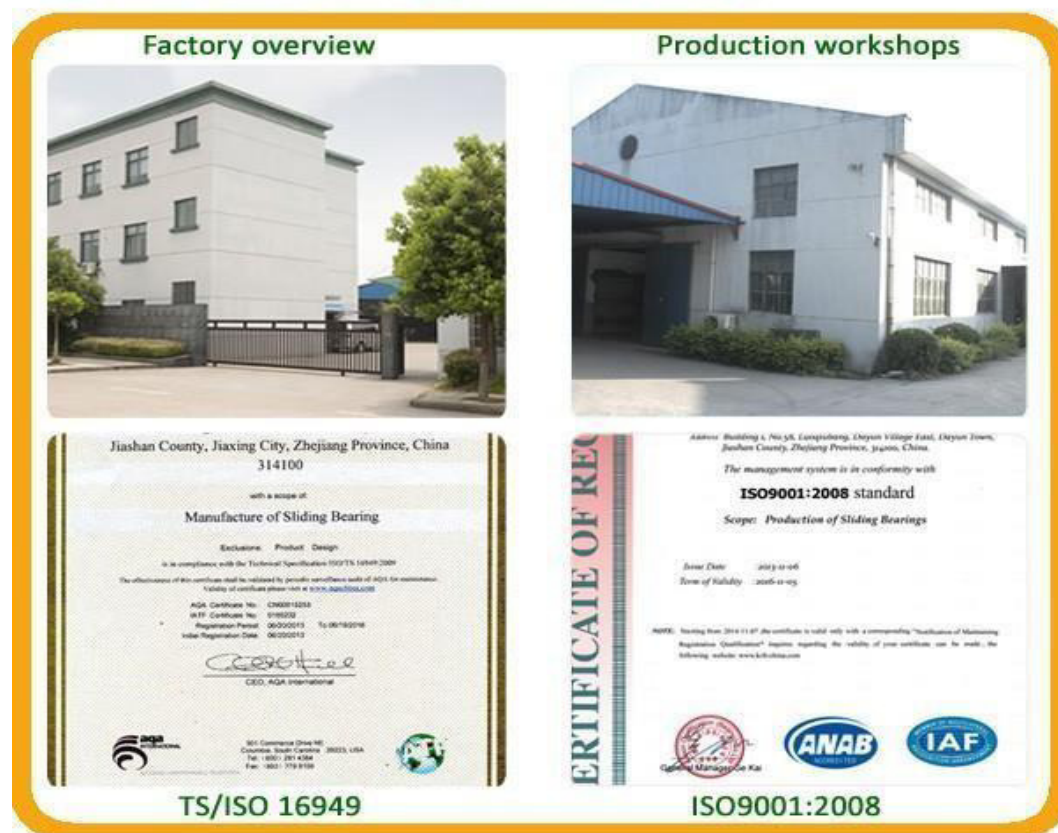

Hunan Jintai Hardware and Machinery Co.,Ltd is a professional manufacturer on various kind of bearings in China for over 15 years.We are making all kinds of slide bearings including DU PTFE composit bushing, DX POM composite bushing,bimetal bushing,wrapped bronze bushing, cast sliding bushings and wear plate bearing pad, sintered bronze bushing and sintering parts, graphite bearing, etc.

The shapes of bearings can be in sleeve, flanged, spherical, plate, washer, pad, ring, square, etc.

Base materials in carbon steel, harden steel, iron, stainless steel, bronze, brass, copper, bronze-steel alloy.Lubricant materials in PTFE, teflon, POM, nylon, plastic, oil, graphite, grease, MoS2,etc.



◇ SF-1



◇ SF-1F



◇ SF-WD



◇ SF-2



◇ JF-800



◇ FB090



◇ FB092



◇ FB08G



◇ FB09G



◇ JDB



◇ FZ



◇ FD

SF-1 自润滑卷制轴承 SF-1 Self-Lubricatin Bearin s



1. 聚四氟乙烯与铅 PTFE with Iead
2. 球形青铜粉 Porous bronze sintere
3. 钢背 Steel backing
4. 镀铜/锡层 Copper-plating/tin-plating



注：SF-1 系列产品还可根据不同工况条件选择不同的基体材料，如：青铜基板

（SF-1B）、不锈钢基板（SF-1S）、以及无铅（SF-1W）等配方产品。

Note: Various materials are suitable for SF-1 Series products according to different working conditions, such as bronze backing (SF-1B), stainless steel backing (SF-1S) and lead-free material (SF-1W)...

技术参数 Tech.Data

最大荷载 Max.Load	静承载 Static	250N/mm ²
	动承载 Dynamic	140N/mm ²
	摇摆运动 Oscillating	60N/mm ²
最大PV值 PV limit	干摩擦 Dry	3.6N/mm ² ·m/s
	油润滑 Oil	50N/mm ² ·m/s
使用温度 Temp.limit		-195℃~+280℃

摩擦系数 Friction Coeff.		0.03~0.20 μ
最大速率 Speed limit	干摩擦 Dry	2mm ²
	油润滑 Oil	5mm ²
导热系数 Thermal conductivity		2.41Kcal/M.br.c
热膨胀系数 Coeff. of linear expansion		27 × 10 ⁻⁶ per℃

SF-1 应用特点 Product characteristics

◎无油润滑或少油润滑，适用于无法加油或很难加油的场所，可在使用时不保养或少保养。

◎耐磨性能好，摩擦系数小，使用寿命长。

◎有适量的弹塑性，能将应力分布在较宽的接触面上，提高轴承的承载能力。

◎静动摩擦系数相近，能消除低速下的爬行，从而保证机械的工作精度。

◎能使机械减少振动、降低噪音，防止污染，改善劳动条件。

◎在运转过程中能形成转移膜，起到保护对磨轴的使用，无咬轴现象。

◎对磨轴的硬度要求低，未经调质处理的轴都可使用，从而降低了相关零件的加工难度。

◎薄壁结构、质量轻，可减小机械体积。

◎钢背面可电镀多种金属，可在腐蚀介质中使用；目前已广泛应用于各种机械的滑动部分，例如：印刷机、纺织机、烟草机械、微电机，汽车、摩托车与农林机械等等。

◎It may be used where no oil can be applied or oil is difficult to be applied.

◎It has the advantage of low wear, low friction and with long life.

Load will spread over a wider area due to the bearing material' s elastic nature.

◎Low stick slip properties ensuring accuracy of machine operation under low sliding speeds.

◎Low vibration, low noise and non-pollution in operation.

◎PTFE and Lead film is transferred to the mating shaft to improve running properties.


◎It can be used in low harness of mating shaft, so the shafts processing is easy.

◎The machine will be compact because of the thin thickness and low weight of the bush.

◎Electro plating is possible to prevent corrosion. It is widely used in various sliding motions of different kind of machines such as textile machine, tobacco machines, hydraulic vehicles Automobiles, agriculture machines and so on.

SF-1 自润滑卷制轴承标准公制尺寸

SF-1 Self-Lubricating Bearings Standard Metric Size

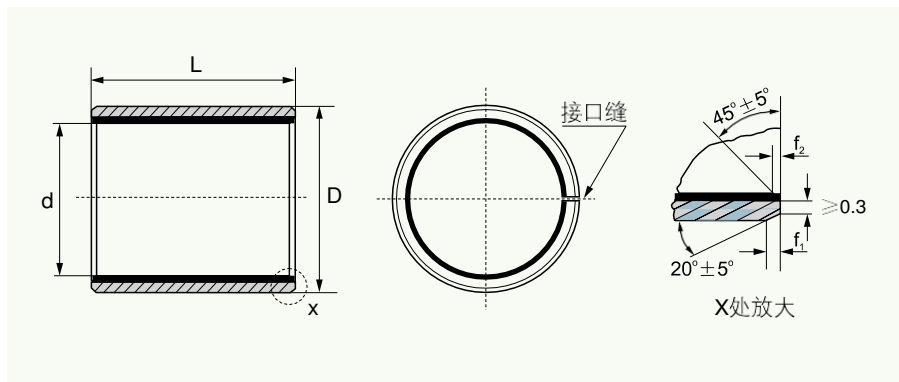

单位 Unit: mm

d	D	相配轴径 Shaft Dia. f_7	座孔 Housing H7	壁厚 Wall Thickness		f_1	f_2	$L \begin{smallmatrix} 0 \\ -0.40 \end{smallmatrix}$									
				最小 Min.	最大 Max.			6	8	10	12	15	20	25	30	40	50
6	8	6 $\begin{smallmatrix} -0.013 \\ -0.028 \end{smallmatrix}$	8 $+0.015$					0606	0608	0610							
8	10	8 $\begin{smallmatrix} -0.013 \\ -0.028 \end{smallmatrix}$	10 $+0.015$					0806	0808	0810	0812	0815					
10	12	10 $\begin{smallmatrix} -0.016 \\ -0.034 \end{smallmatrix}$	12 $+0.018$					1006	1008	1010	1012	1015	1020				
12	14	12 $\begin{smallmatrix} -0.016 \\ -0.034 \end{smallmatrix}$	14 $+0.018$					1206	1208	1210	1212	1215	1220	1225			
13	15	13 $\begin{smallmatrix} -0.016 \\ -0.034 \end{smallmatrix}$	15 $+0.018$	0.980	1.005	0.6	0.3			1310			1320				
14	16	14 $\begin{smallmatrix} -0.016 \\ -0.034 \end{smallmatrix}$	16 $+0.018$							1410	1412	1415	1420	1425			
15	17	15 $\begin{smallmatrix} -0.016 \\ -0.034 \end{smallmatrix}$	17 $+0.018$							1510	1512	1515	1520	1525			
16	18	16 $\begin{smallmatrix} -0.016 \\ -0.034 \end{smallmatrix}$	18 $+0.018$							1610	1612	1615	1620	1625			
17	19	17 $\begin{smallmatrix} -0.016 \\ -0.034 \end{smallmatrix}$	19 $+0.021$							1710	1712		1720				
18	20	18 $\begin{smallmatrix} -0.016 \\ -0.034 \end{smallmatrix}$	20 $+0.021$							1810	1812	1815	1820	1825			
20	23	20 $\begin{smallmatrix} -0.020 \\ -0.041 \end{smallmatrix}$	23 $+0.021$							2010	2012	2015	2020	2025	2030		
22	25	22 $\begin{smallmatrix} -0.020 \\ -0.041 \end{smallmatrix}$	25 $+0.021$	1.475	1.505	0.6	0.4			2210	2212	2215	2220	2225	2230		
24	27	24 $\begin{smallmatrix} -0.020 \\ -0.041 \end{smallmatrix}$	27 $+0.021$									2415	2420	2425	2430		
25	28	25 $\begin{smallmatrix} -0.020 \\ -0.041 \end{smallmatrix}$	28 $+0.021$							2510	2512	2515	2520	2525	2530	2540	2550
28	32	28 $\begin{smallmatrix} -0.020 \\ -0.041 \end{smallmatrix}$	32 $+0.025$									2815	2820	2825	2830	2840	
30	34	30 $\begin{smallmatrix} -0.020 \\ -0.041 \end{smallmatrix}$	34 $+0.025$								3012	3015	3020	3025	3030	3040	
32	36	32 $\begin{smallmatrix} -0.025 \\ -0.050 \end{smallmatrix}$	36 $+0.025$	1.970	2.005	1.2	0.4						3220		3230	3240	
35	39	35 $\begin{smallmatrix} -0.025 \\ -0.050 \end{smallmatrix}$	39 $+0.025$								3512	3515	3520	3525	3530	3540	3550
38	42	38 $\begin{smallmatrix} -0.025 \\ -0.050 \end{smallmatrix}$	42 $+0.025$									3815			3830	3840	
40	44	40 $\begin{smallmatrix} -0.025 \\ -0.050 \end{smallmatrix}$	44 $+0.025$								4012		4020	4025	4030	4040	4050

注：孔径壁厚符合样本，宽度尺寸不在样本范围内客户提出要求，制造厂可定制加工。


Note: Bearing size besides above mentioned sizes, can be customized and produced. Customer please offer us the dimensions.

单位Unit: mm

[illegible]

SF-1F 自润滑卷制翻边轴承标准公制尺寸

SF-1F Self-Lubricating Flanged Bearings Standard Metric Size

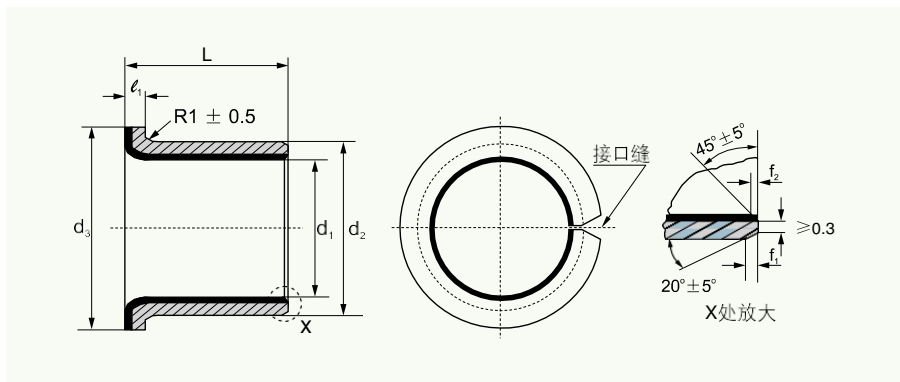

单位 Unit: mm

相配轴径 Shaft Dia. f_7	座孔 Housing H7	代号 Code number	尺寸 Size					f_1	f_2
			d_1	d_2	$d_3 \pm 0.5$	$L \pm 0.25$	$\ell_1 - 0.2$		
6 ^{-0.013 -0.028}	8 ^{+0.015}	06040	6	8	12	4			
		06070				7			
8 ^{-0.013 -0.028}	10 ^{+0.015}	08055	8	10	15	5.5			
		08075				7.5			
10 ^{-0.016 -0.034}	12 ^{+0.018}	10070	10	12	18	7			
		10090				9			
		10120				12			
12 ^{-0.016 -0.034}	14 ^{+0.018}	12070	12	14	20	7			
		12090				9			
		12120				12	1	0.6	0.3
14 ^{-0.016 -0.043}	16 ^{+0.018}	14120	14	16	22	12			
		14170				17			
		15090				9			
15 ^{-0.016 -0.034}	17 ^{+0.018}	15120	15	17	23	12			
		15170				17			
		16120	16	18	24	12			
16 ^{-0.016 -0.034}	18 ^{+0.018}	16170				17			
		18120				12			
18 ^{-0.016 -0.034}	20 ^{+0.021}	18170	18	20	26	17			
		18200				20			
		20115				11.5			
20 ^{-0.020 -0.041}	23 ^{+0.021}	20165	20	23	30	16.5			
		20215				21.5			
		22150	22	25	32	15	1.5	0.6	0.4
22 ^{-0.020 -0.041}	25 ^{+0.021}	22200				20			
		25115				11.5			
25 ^{-0.020 -0.041}	28 ^{+0.021}	25165	25	28	35	16.5			
		25215				21.5			
		30160	30	34	42	16			
30 ^{-0.025 -0.050}	34 ^{+0.025}	30260				26			
		35160	35	39	47	16			
		35260				26	2	1.2	0.4
40 ^{-0.025 -0.050}	44 ^{+0.025}	40260	40	44	53	26			
		40400				40			

SF-2 边界润滑轴承 SF-2 Marginal-Lubrication Bearings




1. 改性聚甲醛 POM with lead 0.3-0.5mm
2. 球形青铜粉 Porous bronze sintere
3. 钢背 Steel backaking
4. 镀铜层 Copper plating



注：SF-2 系列产品还可根据
不同工况条件选择不同的基
体材料，如：青铜基板、不
锈钢基板、以及“无铅”等
配方产品。SF-2Y 属环保无
铅产品，颜色为桔黄色。

Note: Various materials
are suitable for SF- 2
series products
according to different
working conditions,
such as bronze-
backing, stainless steel
backing and lead-free
material. SF-2Y is an
environmental friendly
lead-free product and its
color is orange.

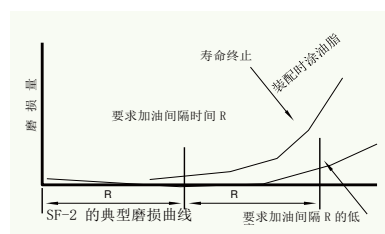

技术参数 Tech.Data

最大何载 Max Load	静承载 Static	250N/mm ²
	动承载 Dynamic	140N/mm ²
	摇摆运动 Oscillating	60N/mm ²
最大 PV 值 PV limit	干摩擦 Dry	2.8N/mm ² ·m/s
	润滑油 Oil	22N/mm ² ·m/s
使用温度 Temp.limit		-40℃~+130℃
摩擦系数 Friction Coeff.		0.05~0.25 μ
最大速率 Speed limit		0.25m/s
导热系数 Thermal conductivity		2.03Kcal/M.br.C
热膨胀系数 Coeff. of linear expansion		51×10 ⁻⁶ per℃
装配时内孔涂润滑油 Initial pre-lubrication at assembly required		

SF-2 应用特点 Characteristic of preformance

◎SF-2 型材料是以填充四氟改性的聚甲醛塑料为表面层三层复合自润滑材料，它是一种良性的边界润滑材料，因此特别适用与高载低速下的旋转运动，摇摆运动以及经常在载荷下启闭而不易形成流体动力润滑的轴承，止推垫片、滑块、球座等磨擦零件。SF-2 能够充分地利用微量润滑脂，在边界润滑条件下可以长期的不用加油保养。在完全无油润滑条件下，SF-2 磨擦性能及允许 PV 值较低，因此通常在塑料表面轧出储油坑，装配时涂上锂基润滑油脂或硅脂等。

◎SF-2 is triple-layer self lubricating material that can fill modified POM plastic as surface layer; it is benignant boundary lubrication material, therefore, it is particularly applicable high-load low-speed rotating and wing movement, as well as in the condition that frequent loaded start-stop is the requirement while hydrodynamic lubrication membrane is difficult to form, in the parts such as bearing, thrust washer, sliding block, ball socket and so on. SF-2 can take full advantage of less grease to work long time without lubrication maintenance under boundary lubrication condition. But under oil-free condition, SF-2 the frictional behavior and permissible PV value is relatively low, so generally storage pit can be formed on the plastic surface, where lithium-based lubricant grease or silicone grease and so on should be applied when being installed.

SF-2 磨损规律 Wear and tear a law

◎SF-2 型材料有其特殊的磨损规律，如图 4 所示在安装时涂油脂的情况下，能在 R 阶段内极微量的磨损。经过 R 阶段时间后失去边界油润滑条件，磨损就开始加剧。如果在此时重新加油，可保持无显著磨损，其寿命亦可以大大地延长。所以 SF-2 材料的优点就在于需要间融 R 阶段时间加油一次，其间隔时间 R 较其它材料特别是金属材料的间隔时间显著地长。约为五倍左右。

◎SF-2 material follows special wearing rule as shown in Fig. 4, infinitesimal abrasion can occur in R phase when being applied with grease and then being installed. But after the R phase, the boundary lubrication condition will disappear and wearing will be exaggerated. If you do refill with oil, the product can be drastically held by non-remarkable wearing and its life will also be greatly extended. Therefore the advantage of SF-2 material is that oil should be added with an interval of R, which is remarkably longer than that of other metal materials. It is approximately five times as long.

◎当装配时涂以润滑脂(如锂基脂或硅脂等)，SF-2 衬套的使用寿命，随工作时所处的 PV 值而上下，如当 PV 值在 2.5MPa·m/s 左右时，其使用寿命约为 200 小时，而当 PV 值在 0.1MPa·m/s 时，其使用寿命可在 10000 小时以上(详见表)


SF-2 衬套的加油保养周期 R 约为寿命的一半左右。例如当 PV=2.5MPa·m/s 时，要求每隔 100 小时必须加油保养一次。

◎When SF-2 bush is installed with application of grease such as lithium-based or silicone grease, its service life varies from the PV value under working condition, for instance, when PV value is about 2.5MPa·m/s, its service life will be about 200hr; when PV value is 0.1MPa·m/s, its service life can be above 10,000hr (see the table for details)

The cycle R of lubrication maintenance of SF-2 bush is about the half of its service life. For instance, when PV=25MPa·m/s, it is required to be oil-lubricated every 100hr.

SF-2 边界润滑轴承标准公制尺寸

SF-2 Marginal-Lubrication Bearings Standard Metric Size

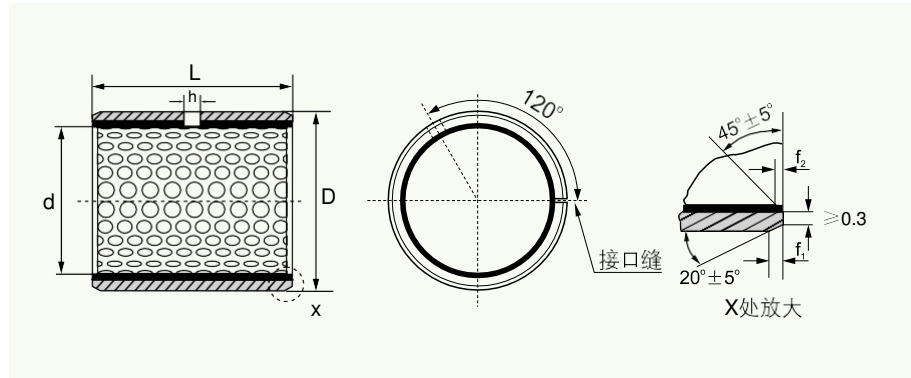

单位 Unit: mm

d	D	相配轴径 Shaft Dia. f ₇	座孔 Housing H7	壁厚 Wall Thickness		油孔 Oil bore H	f ₁	f ₂	L ⁰ _{-0.40}									
				最小 Min.	最大 Max.				10	15	20	25	30	35	40	45	50	60
10	12	10 _{-0.022}	12 ^{+0.018}			4			1010	1015	1020							
12	14	12 _{-0.027}	14 ^{+0.018}			4			1210	1215	1220							
14	16	14 _{-0.027}	16 ^{+0.018}	0.955	0.980	4	0.6	0.3		1415	1420							
15	17	15 _{-0.027}	17 ^{+0.018}			4				1515	1520	1525						
16	18	16 _{-0.027}	18 ^{+0.018}			4				1615	1620	1625						
18	20	18 _{-0.027}	20 ^{+0.021}			4				1815	1820	1825						
20	23	20 _{-0.033}	23 ^{+0.021}			4				2015	2020	2025	2030					
22	25	22 _{-0.033}	25 ^{+0.021}	1.445	1.475	6	0.6	0.4		2215		2225						
25	28	25 _{-0.033}	28 ^{+0.021}			6				2515	2520	2525	2530					
28	32	28 _{-0.033}	32 ^{+0.025}			6					2820		2830					
30	34	30 _{-0.033}	34 ^{+0.025}	1.935	1.970	6	1.2	0.4			3020	3025	3030		3040			
35	39	35 _{-0.039}	39 ^{+0.025}			6						3520		3530	3535	3540		
40	44	40 _{-0.039}	44 ^{+0.025}			8					4020		4030		4040		4050	
45	50	45 _{-0.039}	50 ^{+0.025}			8					4520		4530		4540	4545	4550	
50	55	50 _{-0.039}	55 ^{+0.030}	2.415	2.460	8	1.8	0.6					5030		5040		5050	5060
55	60	55 _{-0.046}	60 ^{+0.030}			8						5530		5540		5550	5560	
60	65	60 _{-0.046}	65 ^{+0.030}			8							6030		6040		6050	6060



SF-2 边界润滑轴承标准公制尺寸

SF-2 Marginal-Lubrication Bearing Standard Metric Size

单位Unit: mm

d	D	相配轴径 Shaft Dia. f ₇	座孔 Housing H7	壁厚 Wall Thickness		油孔 Oil bore H	f ₁	f ₂	L ⁰ _{-0.40}								
				最小 Min.	最大 Max.				40	50	60	80	90	95	100	110	120
65	70	65 ^{-0.046}	70 ^{+0.030}			8			6540		6560						
70	75	70 ^{-0.046}	75 ^{+0.030}	2.415	2.460	8	1.8	0.6	7040	7050		7080					
75	80	75 ^{-0.046}	80 ^{+0.030}			8			7540		7560	7580					
80	85	80 ^{-0.046}	85 ^{+0.035}			9.5			8040		8060	8080					
85	90	85 ^{-0.054}	90 ^{+0.035}			9.5			8540		8560	8580					
90	95	90 ^{-0.054}	95 ^{+0.035}			9.5			9040		9060	9080	9090				
100	105	100 ^{-0.054}	105 ^{+0.035}			9.5	1.8	0.6		10050		10080		10095			
105	110	105 ^{-0.054}	110 ^{+0.035}			9.5					10560	10580		10595		105110	
110	115	110 ^{-0.054}	115 ^{+0.035}			9.5					11060	11080		11095		110110	
120	125	120 ^{-0.054}	125 ^{+0.040}			9.5					12060	12080				120110	
125	130	125 ^{-0.063}	130 ^{+0.040}			9.5					12560					125110	
130	135	130 ^{-0.063}	135 ^{+0.040}			9.5				13050	13060	13080			130100		
140	145	140 ^{-0.063}	145 ^{+0.040}			9.5				14050	14060	14080			140100		
150	155	150 ^{-0.063}	155 ^{+0.040}	2.385	2.450	9.5				15050	15060	15080			150100		
160	165	160 ^{-0.063}	165 ^{+0.040}			9.5				16050	16060	16080			160100		
170	175	170 ^{-0.063}	175 ^{+0.040}			9.5				17050		17080			170100		
180	185	180 ^{-0.063}	185 ^{+0.046}			9.5				18050	18060	18080			180100		
190	195	190 ^{-0.072}	195 ^{+0.046}			9.5	1.8	0.6		19050	19060	19080			190100		190120
200	205	200 ^{-0.072}	205 ^{+0.046}			9.5				20050	20060	20080			200100		200120
220	225	220 ^{-0.072}	225 ^{+0.046}			9.5				22050	22060	22080			220100		220120
240	245	240 ^{-0.072}	245 ^{+0.046}			9.5				24050	24060	24080			240100		240120
250	255	250 ^{-0.072}	255 ^{+0.052}			9.5				25050	25060	25080			250100		250120
260	265	260 ^{-0.081}	265 ^{+0.052}			9.5				26050	26060	26080			260100		260120
280	285	280 ^{-0.081}	285 ^{+0.052}			9.5				28050	28060	28080			280100		280120
300	305	300 ^{-0.081}	305 ^{+0.052}			9.5				30050	30060	30080			300100		300120

JINTAI SLIDE BEARING INTRODUCTION

Tel: 86-731-84770165
Fax: 86-731- 84770163

Http://www.slide-bearing.com/
E-mail:sales@slide-bearing.com



JINTAI SF-2 similar as Interchange Metric Plain Bushings PAP..P20 SERIES Permaglide Metric Bushes. We produce washer as KS PAW P20, bronze base bushing as KS PAP P21,KS PAF P21 P24, inox stainless steel base bushing, inch bushing as EGBZ E50.

JINTAI SF-2 Bearing and PERMAGLIDE Bearing Standard Metric Size

单位 Unit: mm

JINTAI CODE	d*D*L(mm)	CPS CODE	GARLOCK	JINTAI CODE	d*D*L(mm)	CPS CODE	GARLOCK
SF-2 0203	2x3.5x3	PAP 0203 P20	MB 0203 DX	SF-2 9090	90x95x90	PAP 9090 P20	MB 9090 DX
SF-2 0205	2x3.5x5	PAP 0205 P20	MB 0205 DX	SF-2 90100	90x95x100	PAP 90100 P20	MB 90100 DX
SF-2 0303	3x4.5x3	PAP 0303 P20	MB 0303 DX	SF-2 9530	95x100x30	PAP 9530 P20	MB 9530 DX
SF-2 0304	3x4.5x4	PAP 0304 P20	MB 0304 DX	SF-2 9540	95x100x40	PAP 9540 P20	MB 9540 DX
SF-2 0305	3x4.5x5	PAP 0305 P20	MB 0305 DX	SF-2 9550	95x100x50	PAP 9550 P20	MB 9550 DX
SF-2 0306	3x4.5x6	PAP 0306 P20	MB 0306 DX	SF-2 9560	95x100x60	PAP 9560 P20	MB 9560 DX
SF-2 0403	4x5.5x3	PAP 0403 P20	MB 0403 DX	SF-2 9570	95x100x70	PAP 9570 P20	MB 9570 DX
SF-2 0404	4x5.5x4	PAP 0404 P20	MB 0404 DX	SF-2 9580	95x100x80	PAP 9580 P20	MB 9580 DX
SF-2 0405	4x5.5x5	PAP 0405 P20	MB 0405 DX	SF-2 9590	95x100x90	PAP 9590 P20	MB 9590 DX
SF-2 0406	4x5.5x6	PAP 0406 P20	MB 0406 DX	SF-2 95100	95x100x100	PAP 95100 P20	MB 95100 DX
SF-2 0410	4x5.5x10	PAP 0410 P20	MB 0410 DX	SF-2 10020	100x105x20	PAP 10020 P20	MB 10020 DX
SF-2 0505	5x7x5	PAP 0505 P20	MB 0505 DX	SF-2 10030	100x105x30	PAP 10030 P20	MB 10030 DX
SF-2 0506	5x7x6	PAP 0506 P20	MB 0506 DX	SF-2 10040	100x105x40	PAP 10040 P20	MB 10040 DX
SF-2 0507	5x7x7	PAP 0507 P20	MB 0507 DX	SF-2 10050	100x105x50	PAP 10050 P20	MB 10050 DX
SF-2 0508	5x7x8	PAP 0508 P20	MB 0508 DX	SF-2 10060	100x105x60	PAP 10060 P20	MB 10060 DX
SF-2 0510	5x7x10	PAP 0510 P20	MB 0510 DX	SF-2 10070	100x105x70	PAP 10070 P20	MB 10070 DX
SF-2 0604	6x8x4	PAP 0604 P20	MB 0604 DX	SF-2 10080	100x105x80	PAP 10080 P20	MB 10080 DX
SF-2 0605	6x8x5	PAP 0605 P20	MB 0605 DX	SF-2 10090	100x105x90	PAP 10090 P20	MB 10090 DX
SF-2 0606	6x8x6	PAP 0606 P20	MB 0606 DX	SF-2 100100	100x105x100	PAP 100100 P20	MB 100100 DX
SF-2 0608	6x8x8	PAP 0608 P20	MB 0608 DX	SF-2 100115	100x105x115	PAP 100115 P20	MB 100115 DX
SF-2 0610	6x8x10	PAP 0610 P20	MB 0610 DX	SF-2 10550	105x110x50	PAP 10550 P20	MB 10550 DX
SF-2 0705	7x9x5	PAP 0705 P20	MB 0705 DX	SF-2 10560	105x110x60	PAP 10560 P20	MB 10560 DX
SF-2 0706	7x9x6	PAP 0706 P20	MB 0706 DX	SF-2 10570	105x110x70	PAP 10570 P20	MB 10570 DX
SF-2 0708	7x9x8	PAP 0708 P20	MB 0708 DX	SF-2 10580	105x110x80	PAP 10580 P20	MB 10580 DX
SF-2 0710	7x9x10	PAP 0710 P20	MB 0710 DX	SF-2 10590	105x110x90	PAP 10590 P20	MB 10590 DX
SF-2 0715	7x9x15	PAP 0715 P20	MB 0715 DX	SF-2 105100	105x110x100	PAP 105100 P20	MB 105100 DX
SF-2 0805	8x10x5	PAP 0805 P20	MB 0805 DX	SF-2 105115	105x110x115	PAP 105115 P20	MB 105115 DX
SF-2 0806	8x10x6	PAP 0806 P20	MB 0806 DX	SF-2 11050	110x115x50	PAP 11050 P20	MB 11050 DX
SF-2 0808	8x10x8	PAP 0808 P20	MB 0808 DX	SF-2 11060	110x115x60	PAP 11060 P20	MB 11060 DX
SF-2 0810	8x10x10	PAP 0810 P20	MB 0810 DX	SF-2 11070	110x115x70	PAP 11070 P20	MB 11070 DX
SF-2 0812	8x10x12	PAP 0812 P20	MB 0812 DX	SF-2 11080	110x115x80	PAP 11080 P20	MB 11080 DX
SF-2 0815	8x10x15	PAP 0815 P20	MB 0815 DX	SF-2 11090	110x115x90	PAP 11090 P20	MB 11090 DX
SF-2 0820	8x10x20	PAP 0820 P20	MB 0820 DX	SF-2 11095	110x115x95	PAP 11095 P20	MB 11095 DX
SF-2 0908	9x11x8	PAP 0908 P20	MB 0908 DX	SF-2 110100	110x115x100	PAP 110100 P20	MB 110100 DX
SF-2 0909	9x11x9	PAP 0909 P20	MB 0909 DX	SF-2 110115	110x115x115	PAP 110115 P20	MB 110115 DX
SF-2 0910	9x11x10	PAP 0910 P20	MB 0910 DX	SF-2 11550	115x120x50	PAP 11550 P20	MB 11550 DX
SF-2 1005	10x12x5	PAP 1005 P20	MB 1005 DX	SF-2 11560	115x120x60	PAP 11560 P20	MB 11560 DX
SF-2 1006	10x12x6	PAP 1006 P20	MB 1006 DX	SF-2 11570	115x120x70	PAP 11570 P20	MB 11570 DX
SF-2 1008	10x12x8	PAP 1008 P20	MB 1008 DX	SF-2 11580	115x120x80	PAP 11580 P20	MB 11580 DX
SF-2 1009	10x12x9	PAP 1009 P20	MB 1009 DX	SF-2 11590	115x120x90	PAP 11590 P20	MB 11590 DX
SF-2 1010	10x12x10	PAP 1010 P20	MB 1010 DX	SF-2 115100	115x120x100	PAP 115100 P20	MB 115100 DX
SF-2 1012	10x12x12	PAP 1012 P20	MB 1012 DX	SF-2 115115	115x120x115	PAP 115115 P20	MB 115115 DX
SF-2 1015	10x12x15	PAP 1015 P20	MB 1015 DX	SF-2 12050	120x125x50	PAP 12050 P20	MB 12050 DX
SF-2 1020	10x12x20	PAP 1020 P20	MB 1020 DX	SF-2 12060	120x125x60	PAP 12060 P20	MB 12060 DX
SF-2 1108	11x13x8	PAP 1108 P20	MB 1108 DX	SF-2 12070	120x125x70	PAP 12070 P20	MB 12070 DX
SF-2 1109	11x13x9	PAP 1109 P20	MB 1109 DX	SF-2 12080	120x125x80	PAP 12080 P20	MB 12080 DX
SF-2 1110	11x13x10	PAP 1110 P20	MB 1110 DX	SF-2 12090	120x125x90	PAP 12090 P20	MB 12090 DX
SF-2 1112	11x13x12	PAP 1112 P20	MB 1112 DX	SF-2 120100	120x125x100	PAP 120100 P20	MB 120100 DX
SF-2 1206	12x14x6	PAP 1206 P20	MB 1206 DX	SF-2 120120	120x125x120	PAP 120120 P20	MB 120120 DX
SF-2 1208	12x14x8	PAP 1208 P20	MB 1208 DX	SF-2 12550	125x130x50	PAP 12550 P20	MB 12550 DX
SF-2 1210	12x14x10	PAP 1210 P20	MB 1210 DX	SF-2 12560	125x130x60	PAP 12560 P20	MB 12560 DX
SF-2 1212	12x14x12	PAP 1212 P20	MB 1212 DX	SF-2 12570	125x130x70	PAP 12570 P20	MB 12570 DX
SF-2 1214	12x14x14	PAP 1214 P20	MB 1214 DX	SF-2 12580	125x130x80	PAP 12580 P20	MB 12580 DX
SF-2 1215	12x14x15	PAP 1215 P20	MB 1215 DX	SF-2 12590	125x130x90	PAP 12590 P20	MB 12590 DX
SF-2 1216	12x14x16	PAP 1216 P20	MB 1216 DX	SF-2 125100	125x130x100	PAP 125100 P20	MB 125100 DX
SF-2 1220	12x14x20	PAP 1220 P20	MB 1220 DX	SF-2 125115	125x130x115	PAP 125115 P20	MB 125115 DX
SF-2 1225	12x14x25	PAP 1225 P20	MB 1225 DX	SF-2 13060	130x135x60	PAP 13060 P20	MB 13060 DX
SF-2 1308	13x15x8	PAP 1308 P20	MB 1308 DX	SF-2 13070	130x135x70	PAP 13070 P20	MB 13070 DX
SF-2 1309	13x15x9	PAP 1309 P20	MB 1309 DX	SF-2 13080	130x135x80	PAP 13080 P20	MB 13080 DX
SF-2 1310	13x15x10	PAP 1310 P20	MB 1310 DX	SF-2 13090	130x135x90	PAP 13090 P20	MB 13090 DX
SF-2 1312	13x15x12	PAP 1312 P20	MB 1312 DX	SF-2 130100	130x135x100	PAP 130100 P20	MB 130100 DX
SF-2 1315	13x15x15	PAP 1315 P20	MB 1315 DX	SF-2 130120	130x135x120	PAP 130120 P20	MB 130120 DX
SF-2 1320	13x15x20	PAP 1320 P20	MB 1320 DX	SF-2 13560	135x140x60	PAP 13560 P20	MB 13560 DX
SF-2 1325	13x15x25	PAP 1325 P20	MB 1325 DX	SF-2 13570	135x140x70	PAP 13570 P20	MB 13570 DX


SF-2 1408	14x16x08	PAP 1408 P20	MB 1408 DX	SF-2 13580	135x140x80	PAP 13580 P20	MB 13580 DX
SF-2 1410	14x16x10	PAP 1410 P20	MB 1410 DX	SF-2 13590	135x140x90	PAP 13590 P20	MB 13590 DX
SF-2 1412	14x16x12	PAP 1412 P20	MB 1412 DX	SF-2 135100	135x140x100	PAP 135100 P20	MB 135100 DX
SF-2 1415	14x16x15	PAP 1415 P20	MB 1415 DX	SF-2 135120	135x140x120	PAP 135120 P20	MB 135120 DX
SF-2 1420	14x16x20	PAP 1420 P20	MB 1420 DX	SF-2 14060	140x145x60	PAP 14060 P20	MB 14060 DX
SF-2 1422	14x16x22	PAP 1422 P20	MB 1422 DX	SF-2 14070	140x145x70	PAP 14070 P20	MB 14070 DX
SF-2 1425	14x16x25	PAP 1425 P20	MB 1425 DX	SF-2 14080	140x145x80	PAP 14080 P20	MB 14080 DX
SF-2 1508	15x17x8	PAP 1508 P20	MB 1508 DX	SF-2 14090	140x145x90	PAP 14090 P20	MB 14090 DX
SF-2 1510	15x17x10	PAP 1510 P20	MB 1510 DX	SF-2 140100	140x145x100	PAP 140100 P20	MB 140100 DX
SF-2 1512	15x17x12	PAP 1512 P20	MB 1512 DX	SF-2 14560	145x150x60	PAP 14560 P20	MB 14560 DX
SF-2 1515	15x17x15	PAP 1515 P20	MB 1515 DX	SF-2 14570	145x150x70	PAP 14570 P20	MB 14570 DX
SF-2 1518	15x17x18	PAP 1518 P20	MB 1518 DX	SF-2 14580	145x150x80	PAP 14580 P20	MB 14580 DX
SF-2 1520	15x17x20	PAP 1520 P20	MB 1520 DX	SF-2 14590	145x150x90	PAP 14590 P20	MB 14590 DX
SF-2 1525	15x17x25	PAP 1525 P20	MB 1525 DX	SF-2 145100	145x150x100	PAP 145100 P20	MB 145100 DX
SF-2 1608	16x18x8	PAP 1608 P20	MB 1608 DX	SF-2 145120	145x150x120	PAP 145120 P20	MB 145120 DX
SF-2 1610	16x18x10	PAP 1610 P20	MB 1610 DX	SF-2 15050	150x155x50	PAP 15050 P20	MB 15050 DX
SF-2 1612	16x18x12	PAP 1612 P20	MB 1612 DX	SF-2 15060	150x155x60	PAP 15060 P20	MB 15060 DX
SF-2 1615	16x18x15	PAP 1615 P20	MB 1615 DX	SF-2 15070	150x155x70	PAP 15070 P20	MB 15070 DX
SF-2 1618	16x18x18	PAP 1618 P20	MB 1618 DX	SF-2 15080	150x155x80	PAP 15080 P20	MB 15080 DX
SF-2 1620	16x18x20	PAP 1620 P20	MB 1620 DX	SF-2 15090	150x155x90	PAP 15090 P20	MB 15090 DX
SF-2 1625	16x18x25	PAP 1625 P20	MB 1625 DX	SF-2 150100	150x155x100	PAP 150100 P20	MB 150100 DX
SF-2 1630	16x18x30	PAP 1630 P20	MB 1630 DX	SF-2 15550	155x160x50	PAP 15550 P20	MB 15550 DX
SF-2 1708	17x19x8	PAP 1708 P20	MB 1708 DX	SF-2 15560	155x160x60	PAP 15560 P20	MB 15560 DX
SF-2 1710	17x19x10	PAP 1710 P20	MB 1710 DX	SF-2 15570	155x160x70	PAP 15570 P20	MB 15570 DX
SF-2 1712	17x19x12	PAP 1712 P20	MB 1712 DX	SF-2 15580	155x160x80	PAP 15580 P20	MB 15580 DX
SF-2 1715	17x19x15	PAP 1715 P20	MB 1715 DX	SF-2 15590	155x160x90	PAP 15590 P20	MB 15590 DX
SF-2 1718	17x19x18	PAP 1718 P20	MB 1718 DX	SF-2 155100	155x160x100	PAP 155100 P20	MB 155100 DX
SF-2 1720	17x19x20	PAP 1720 P20	MB 1720 DX	SF-2 16050	160x165x50	PAP 16050 P20	MB 16050 DX
SF-2 1725	17x19x25	PAP 1725 P20	MB 1725 DX	SF-2 16060	160x165x60	PAP 16060 P20	MB 16060 DX
SF-2 1808	18x20x8	PAP 1808 P20	MB 1808 DX	SF-2 16070	160x165x70	PAP 16070 P20	MB 16070 DX
SF-2 1810	18x20x10	PAP 1810 P20	MB 1810 DX	SF-2 16080	160x165x80	PAP 16080 P20	MB 16080 DX
SF-2 1812	18x20x12	PAP 1812 P20	MB 1812 DX	SF-2 16090	160x165x90	PAP 16090 P20	MB 16090 DX
SF-2 1815	18x20x15	PAP 1815 P20	MB 1815 DX	SF-2 160100	160x165x100	PAP 160100 P20	MB 160100 DX
SF-2 1820	18x20x20	PAP 1820 P20	MB 1820 DX	SF-2 160110	160x165x110	PAP 160110 P20	MB 160110 DX
SF-2 1825	18x20x25	PAP 1825 P20	MB 1825 DX	SF-2 160120	160x165x120	PAP 160120 P20	MB 160120 DX
SF-2 1830	18x20x30	PAP 1830 P20	MB 1830 DX	SF-2 160130	160x165x130	PAP 160130 P20	MB 160130 DX
SF-2 1815a	18x21x15	PAP 1815a P20	MB 1815a DX	SF-2 160140	160x165x140	PAP 160140 P20	MB 160140 DX
SF-2 1820a	18x21x20	PAP 1820a P20	MB 1820a DX	SF-2 160150	160x165x150	PAP 160150 P20	MB 160150 DX
SF-2 1825a	18x21x25	PAP 1825a P20	MB 1825a DX	SF-2 16560	165x170x60	PAP 16560 P20	MB 16560 DX
SF-2 2010a	20x22x10	PAP 2010a P20	MB 2010a DX	SF-2 16570	165x170x70	PAP 16570 P20	MB 16570 DX
SF-2 2012a	20x22x12	PAP 2012a P20	MB 2012a DX	SF-2 16580	165x170x80	PAP 16580 P20	MB 16580 DX
SF-2 2015a	20x22x15	PAP 2015a P20	MB 2015a DX	SF-2 16590	165x170x90	PAP 16590 P20	MB 16590 DX
SF-2 2020a	20x22x20	PAP 2020a P20	MB 2020a DX	SF-2 165100	165x170x100	PAP 165100 P20	MB 165100 DX
SF-2 2025a	20x22x25	PAP 2025a P20	MB 2025a DX	SF-2 165110	165x170x110	PAP 165110 P20	MB 165110 DX
SF-2 2030a	20x22x30	PAP 2030a P20	MB 2030a DX	SF-2 165120	165x170x120	PAP 165120 P20	MB 165120 DX
SF-2 2035a	20x22x35	PAP 2035a P20	MB 2035a DX	SF-2 165130	165x170x130	PAP 165130 P20	MB 165130 DX
SF-2 2040a	20x22x40	PAP 2040a P20	MB 2040a DX	SF-2 165140	165x170x140	PAP 165140 P20	MB 165140 DX
SF-2 2008	20x23x8	PAP 2008 P20	MB 2008 DX	SF-2 165150	165x170x150	PAP 165150 P20	MB 165150 DX
SF-2 2010	20x23x10	PAP 2010 P20	MB 2010 DX	SF-2 17060	170x175x60	PAP 17060 P20	MB 17060 DX
SF-2 2012	20x23x12	PAP 2012 P20	MB 2012 DX	SF-2 17070	170x175x70	PAP 17070 P20	MB 17070 DX
SF-2 2015	20x23x15	PAP 2015 P20	MB 2015 DX	SF-2 17080	170x175x80	PAP 17080 P20	MB 17080 DX
SF-2 2020	20x23x20	PAP 2020 P20	MB 2020 DX	SF-2 17090	170x175x90	PAP 17090 P20	MB 17090 DX
SF-2 2025	20x23x25	PAP 2025 P20	MB 2025 DX	SF-2 170100	170x175x100	PAP 170100 P20	MB 170100 DX
SF-2 2030	20x23x30	PAP 2030 P20	MB 2030 DX	SF-2 170110	170x175x110	PAP 170110 P20	MB 170110 DX
SF-2 2035	20x23x35	PAP 2035 P20	MB 2035 DX	SF-2 170120	170x175x120	PAP 170120 P20	MB 170120 DX
SF-2 2040	20x23x40	PAP 2040 P20	MB 2040 DX	SF-2 170130	170x175x130	PAP 170130 P20	MB 170130 DX
SF-2 2210	22x25x10	PAP 2210 P20	MB 2210 DX	SF-2 170140	170x175x140	PAP 170140 P20	MB 170140 DX
SF-2 2212	22x25x12	PAP 2212 P20	MB 2212 DX	SF-2 170150	170x175x150	PAP 170150 P20	MB 170150 DX
SF-2 2215	22x25x15	PAP 2215 P20	MB 2215 DX	SF-2 17560	175x180x60	PAP 17560 P20	MB 17560 DX
SF-2 2220	22x25x20	PAP 2220 P20	MB 2220 DX	SF-2 17570	175x180x70	PAP 17570 P20	MB 17570 DX
SF-2 2225	22x25x25	PAP 2225 P20	MB 2225 DX	SF-2 17580	175x180x80	PAP 17580 P20	MB 17580 DX
SF-2 2230	22x25x30	PAP 2230 P20	MB 2230 DX	SF-2 17590	175x180x90	PAP 17590 P20	MB 17590 DX
SF-2 2235	22x25x35	PAP 2235 P20	MB 2235 DX	SF-2 175100	175x180x100	PAP 175100 P20	MB 175100 DX
SF-2 2238	22x25x38	PAP 2238 P20	MB 2238 DX	SF-2 175110	175x180x110	PAP 175110 P20	MB 175110 DX
SF-2 2240	22x25x40	PAP 2240 P20	MB 2240 DX	SF-2 175120	175x180x120	PAP 175120 P20	MB 175120 DX
SF-2 2245	22x25x45	PAP 2245 P20	MB 2245 DX	SF-2 175130	175x180x130	PAP 175130 P20	MB 175130 DX
SF-2 2250	22x25x50	PAP 2250 P20	MB 2250 DX	SF-2 175140	175x180x140	PAP 175140 P20	MB 175140 DX
SF-2 2410	24x27x10	PAP 2410 P20	MB 2410 DX	SF-2 175150	175x180x150	PAP 175150 P20	MB 175150 DX
SF-2 2412	24x27x12	PAP 2412 P20	MB 2412 DX	SF-2 18060	180x185x60	PAP 18060 P20	MB 18060 DX
SF-2 2415	24x27x15	PAP 2415 P20	MB 2415 DX	SF-2 18070	180x185x70	PAP 18070 P20	MB 18070 DX
SF-2 2420	24x27x20	PAP 2420 P20	MB 2420 DX	SF-2 18080	180x185x80	PAP 18080 P20	MB 18080 DX
SF-2 2425	24x27x25	PAP 2425 P20	MB 2425 DX	SF-2 18090	180x185x90	PAP 18090 P20	MB 18090 DX
SF-2 2428	24x27x28	PAP 2428 P20	MB 2428 DX	SF-2 180100	180x185x100	PAP 180100 P20	MB 180100 DX
SF-2 2430	24x27x30	PAP 2430 P20	MB 2430 DX	SF-2 180110	180x185x110	PAP 180110 P20	MB 180110 DX
SF-2 2432	24x27x32	PAP 2432 P20	MB 2432 DX	SF-2 180120	180x185x120	PAP 180120 P20	MB 180120 DX
SF-2 2435	24x27x35	PAP 2435 P20	MB 2435 DX	SF-2 180130	180x185x130	PAP 180130 P20	MB 180130 DX
SF-2 2438	24x27x38	PAP 2438 P20	MB 2438 DX	SF-2 180140	180x185x140	PAP 180140 P20	MB 180140 DX
SF-2 2440	24x27x40	PAP 2440 P20	MB 2440 DX	SF-2 180150	180x185x150	PAP 180150 P20	MB 180150 DX
SF-2 2450	24x27x50	PAP 2450 P20	MB 2450 DX	SF-2 18560	185x190x60	PAP 18560 P20	MB 18560 DX
SF-2 2410b	24x28x10	PAP 2410b P20	MB 2410b DX	SF-2 18570	185x190x70	PAP 18570 P20	MB 18570 DX
SF-2 2412b	24x28x12	PAP 2412b P20	MB 2412b DX	SF-2 18580	185x190x80	PAP 18580 P20	MB 18580 DX
SF-2 2415b	24x28x15	PAP 2415b P20	MB 2415b DX	SF-2 18590	185x190x90	PAP 18590 P20	MB 18590 DX
SF-2 2420b	24x28x20	PAP 2420b P20	MB 2420b DX	SF-2 185100	185x190x100	PAP 185100 P20	MB 185100 DX
SF-2 2425b	24x28x25	PAP 2425b P20	MB 2425b DX	SF-2 185110	185x190x110	PAP 185110 P20	MB 185110 DX
SF-2 2428b	24x28x28	PAP 2428b P20	MB 2428b DX	SF-2 185120	185x190x120	PAP 185120 P20	MB 185120 DX
SF-2 2430b	24x28x30	PAP 2430b P20	MB 2430b DX	SF-2 185130	185x190x130	PAP 185130 P20	MB 185130 DX
SF-2 2432b	24x28x32	PAP 2432b P20	MB 2432b DX	SF-2 185140	185x190x140	PAP 185140 P20	MB 185140 DX
SF-2 2435b	24x28x35	PAP 2435b P20	MB 2435b DX	SF-2 185150	185x190x150	PAP 185150 P20	MB 185150 DX

SF-2 2438b	24x28x38	PAP 2438b P20	MB 2438b DX	SF-2 19060	190x195x60	PAP 19060 P20	MB 19060 DX
SF-2 2440b	24x28x40	PAP 2440b P20	MB 2440b DX	SF-2 19070	190x195x70	PAP 19070 P20	MB 19070 DX
SF-2 2450b	24x28x50	PAP 2450b P20	MB 2450b DX	SF-2 19080	190x195x80	PAP 19080 P20	MB 19080 DX
SF-2 2510	25x28x10	PAP 2510 P20	MB 2510 DX	SF-2 19090	190x195x90	PAP 19090 P20	MB 19090 DX
SF-2 2512	25x28x12	PAP 2512 P20	MB 2512 DX	SF-2 190100	190x195x100	PAP 190100 P20	MB 190100 DX
SF-2 2515	25x28x15	PAP 2515 P20	MB 2515 DX	SF-2 190110	190x195x110	PAP 190110 P20	MB 190110 DX
SF-2 2520	25x28x20	PAP 2520 P20	MB 2520 DX	SF-2 190120	190x195x120	PAP 190120 P20	MB 190120 DX
SF-2 2525	25x28x25	PAP 2525 P20	MB 2525 DX	SF-2 190130	190x195x130	PAP 190130 P20	MB 190130 DX
SF-2 2528	25x28x28	PAP 2528 P20	MB 2528 DX	SF-2 190140	190x195x140	PAP 190140 P20	MB 190140 DX
SF-2 2530	25x28x30	PAP 2530 P20	MB 2530 DX	SF-2 190150	190x195x150	PAP 190150 P20	MB 190150 DX
SF-2 2532	25x28x32	PAP 2532 P20	MB 2532 DX	SF-2 19560	195x200x60	PAP 19560 P20	MB 19560 DX
SF-2 2535	25x28x35	PAP 2535 P20	MB 2535 DX	SF-2 19570	195x200x70	PAP 19570 P20	MB 19570 DX
SF-2 2540	25x28x40	PAP 2540 P20	MB 2540 DX	SF-2 19580	195x200x80	PAP 19580 P20	MB 19580 DX
SF-2 2550	25x28x50	PAP 2550 P20	MB 2550 DX	SF-2 19590	195x200x90	PAP 19590 P20	MB 19590 DX
SF-2 2560	25x28x60	PAP 2560 P20	MB 2560 DX	SF-2 195100	195x200x100	PAP 195100 P20	MB 195100 DX
SF-2 2610	26x30x10	PAP 2610 P20	MB 2610 DX	SF-2 195110	195x200x110	PAP 195110 P20	MB 195110 DX
SF-2 2612	26x30x12	PAP 2612 P20	MB 2612 DX	SF-2 195120	195x200x120	PAP 195120 P20	MB 195120 DX
SF-2 2615	26x30x15	PAP 2615 P20	MB 2615 DX	SF-2 195130	195x200x130	PAP 195130 P20	MB 195130 DX
SF-2 2620	26x30x20	PAP 2620 P20	MB 2620 DX	SF-2 195140	195x200x140	PAP 195140 P20	MB 195140 DX
SF-2 2625	26x30x25	PAP 2625 P20	MB 2625 DX	SF-2 195150	195x200x150	PAP 195150 P20	MB 195150 DX
SF-2 2630	26x30x30	PAP 2630 P20	MB 2630 DX	SF-2 20060	200x205x60	PAP 20060 P20	MB 20060 DX
SF-2 2635	26x30x35	PAP 2635 P20	MB 2635 DX	SF-2 20070	200x205x70	PAP 20070 P20	MB 20070 DX
SF-2 2640	26x30x40	PAP 2640 P20	MB 2640 DX	SF-2 20080	200x205x80	PAP 20080 P20	MB 20080 DX
SF-2 2650	26x30x50	PAP 2650 P20	MB 2650 DX	SF-2 20090	200x205x90	PAP 20090 P20	MB 20090 DX
SF-2 2810	28x32x10	PAP 2810 P20	MB 2810 DX	SF-2 200100	200x205x100	PAP 200100 P20	MB 200100 DX
SF-2 2812	28x32x12	PAP 2812 P20	MB 2812 DX	SF-2 200110	200x205x110	PAP 200110 P20	MB 200110 DX
SF-2 2815	28x32x15	PAP 2815 P20	MB 2815 DX	SF-2 200120	200x205x120	PAP 200120 P20	MB 200120 DX
SF-2 2820	28x32x20	PAP 2820 P20	MB 2820 DX	SF-2 200130	200x205x130	PAP 200130 P20	MB 200130 DX
SF-2 2825	28x32x25	PAP 2825 P20	MB 2825 DX	SF-2 200140	200x205x140	PAP 200140 P20	MB 200140 DX
SF-2 2830	28x32x30	PAP 2830 P20	MB 2830 DX	SF-2 200150	200x205x150	PAP 200150 P20	MB 200150 DX
SF-2 2832	28x32x32	PAP 2832 P20	MB 2832 DX	SF-2 20560	205x210x60	PAP 20560 P20	MB 20560 DX
SF-2 2835	28x32x35	PAP 2835 P20	MB 2835 DX	SF-2 20570	205x210x70	PAP 20570 P20	MB 20570 DX
SF-2 2840	28x32x40	PAP 2840 P20	MB 2840 DX	SF-2 20580	205x210x80	PAP 20580 P20	MB 20580 DX
SF-2 3010	30x34x10	PAP 3010 P20	MB 3010 DX	SF-2 20590	205x210x90	PAP 20590 P20	MB 20590 DX
SF-2 3012	30x34x12	PAP 3012 P20	MB 3012 DX	SF-2 205100	205x210x100	PAP 205100 P20	MB 205100 DX
SF-2 3015	30x34x15	PAP 3015 P20	MB 3015 DX	SF-2 205110	205x210x110	PAP 205110 P20	MB 205110 DX
SF-2 3020	30x34x20	PAP 3020 P20	MB 3020 DX	SF-2 205120	205x210x120	PAP 205120 P20	MB 205120 DX
SF-2 3025	30x34x25	PAP 3025 P20	MB 3025 DX	SF-2 205130	205x210x130	PAP 205130 P20	MB 205130 DX
SF-2 3028	30x34x28	PAP 3028 P20	MB 3028 DX	SF-2 205140	205x210x140	PAP 205140 P20	MB 205140 DX
SF-2 3030	30x34x30	PAP 3030 P20	MB 3030 DX	SF-2 205150	205x210x150	PAP 205150 P20	MB 205150 DX
SF-2 3032	30x34x32	PAP 3032 P20	MB 3032 DX	SF-2 21060	210x215x60	PAP 21060 P20	MB 21060 DX
SF-2 3035	30x34x35	PAP 3035 P20	MB 3035 DX	SF-2 21070	210x215x70	PAP 21070 P20	MB 21070 DX
SF-2 3038	30x34x38	PAP 3038 P20	MB 3038 DX	SF-2 21080	210x215x80	PAP 21080 P20	MB 21080 DX
SF-2 3040	30x34x40	PAP 3040 P20	MB 3040 DX	SF-2 21090	210x215x90	PAP 21090 P20	MB 21090 DX
SF-2 3045	30x34x45	PAP 3045 P20	MB 3045 DX	SF-2 210100	210x215x100	PAP 210100 P20	MB 210100 DX
SF-2 3050	30x34x50	PAP 3050 P20	MB 3050 DX	SF-2 210110	210x215x110	PAP 210110 P20	MB 210110 DX
SF-2 3210	32x36x10	PAP 3210 P20	MB 3210 DX	SF-2 210120	210x215x120	PAP 210120 P20	MB 210120 DX
SF-2 3212	32x36x12	PAP 3212 P20	MB 3212 DX	SF-2 210130	210x215x130	PAP 210130 P20	MB 210130 DX
SF-2 3215	32x36x15	PAP 3215 P20	MB 3215 DX	SF-2 210140	210x215x140	PAP 210140 P20	MB 210140 DX
SF-2 3218	32x36x18	PAP 3218 P20	MB 3218 DX	SF-2 210150	210x215x150	PAP 210150 P20	MB 210150 DX
SF-2 3220	32x36x20	PAP 3220 P20	MB 3220 DX	SF-2 21560	215x220x60	PAP 21560 P20	MB 21560 DX
SF-2 3225	32x36x25	PAP 3225 P20	MB 3225 DX	SF-2 21570	215x220x70	PAP 21570 P20	MB 21570 DX
SF-2 3230	32x36x30	PAP 3230 P20	MB 3230 DX	SF-2 21580	215x220x80	PAP 21580 P20	MB 21580 DX
SF-2 3235	32x36x35	PAP 3235 P20	MB 3235 DX	SF-2 21590	215x220x90	PAP 21590 P20	MB 21590 DX
SF-2 3240	32x36x40	PAP 3240 P20	MB 3240 DX	SF-2 215100	215x220x100	PAP 215100 P20	MB 215100 DX
SF-2 3245	32x36x45	PAP 3245 P20	MB 3245 DX	SF-2 215110	215x220x110	PAP 215110 P20	MB 215110 DX
SF-2 3250	32x36x50	PAP 3250 P20	MB 3250 DX	SF-2 215120	215x220x120	PAP 215120 P20	MB 215120 DX
SF-2 3410	34x38x10	PAP 3410 P20	MB 3410 DX	SF-2 215130	215x220x130	PAP 215130 P20	MB 215130 DX
SF-2 3412	34x38x12	PAP 3412 P20	MB 3412 DX	SF-2 215140	215x220x140	PAP 215140 P20	MB 215140 DX
SF-2 3415	34x38x15	PAP 3415 P20	MB 3415 DX	SF-2 215150	215x220x150	PAP 215150 P20	MB 215150 DX
SF-2 3420	34x38x20	PAP 3420 P20	MB 3420 DX	SF-2 22060	220x225x60	PAP 22060 P20	MB 22060 DX
SF-2 3425	34x38x25	PAP 3425 P20	MB 3425 DX	SF-2 22070	220x225x70	PAP 22070 P20	MB 22070 DX
SF-2 3430	34x38x30	PAP 3430 P20	MB 3430 DX	SF-2 22080	220x225x80	PAP 22080 P20	MB 22080 DX
SF-2 3435	34x38x35	PAP 3435 P20	MB 3435 DX	SF-2 22090	220x225x90	PAP 22090 P20	MB 22090 DX
SF-2 3440	34x38x40	PAP 3440 P20	MB 3440 DX	SF-2 220100	220x225x100	PAP 220100 P20	MB 220100 DX
SF-2 3445	34x38x45	PAP 3445 P20	MB 3445 DX	SF-2 220110	220x225x110	PAP 220110 P20	MB 220110 DX
SF-2 3510	35x39x10	PAP 3510 P20	MB 3510 DX	SF-2 220120	220x225x120	PAP 220120 P20	MB 220120 DX
SF-2 3512	35x39x12	PAP 3512 P20	MB 3512 DX	SF-2 220130	220x225x130	PAP 220130 P20	MB 220130 DX
SF-2 3515	35x39x15	PAP 3515 P20	MB 3515 DX	SF-2 220140	220x225x140	PAP 220140 P20	MB 220140 DX
SF-2 3520	35x39x20	PAP 3520 P20	MB 3520 DX	SF-2 220150	220x225x150	PAP 220150 P20	MB 220150 DX
SF-2 3525	35x39x25	PAP 3525 P20	MB 3525 DX	SF-2 22560	225x230x60	PAP 22560 P20	MB 22560 DX
SF-2 3530	35x39x30	PAP 3530 P20	MB 3530 DX	SF-2 22570	225x230x70	PAP 22570 P20	MB 22570 DX
SF-2 3535	35x39x35	PAP 3535 P20	MB 3535 DX	SF-2 22580	225x230x80	PAP 22580 P20	MB 22580 DX
SF-2 3540	35x39x40	PAP 3540 P20	MB 3540 DX	SF-2 22590	225x230x90	PAP 22590 P20	MB 22590 DX
SF-2 3545	35x39x45	PAP 3545 P20	MB 3545 DX	SF-2 225100	225x230x100	PAP 225100 P20	MB 225100 DX
SF-2 3550	35x39x50	PAP 3550 P20	MB 3550 DX	SF-2 225110	225x230x110	PAP 225110 P20	MB 225110 DX
SF-2 3610	36x40x10	PAP 3610 P20	MB 3610 DX	SF-2 225120	225x230x120	PAP 225120 P20	MB 225120 DX
SF-2 3612	36x40x12	PAP 3612 P20	MB 3612 DX	SF-2 225130	225x230x130	PAP 225130 P20	MB 225130 DX
SF-2 3615	36x40x15	PAP 3615 P20	MB 3615 DX	SF-2 225140	225x230x140	PAP 225140 P20	MB 225140 DX
SF-2 3620	36x40x20	PAP 3620 P20	MB 3620 DX	SF-2 23060	230x235x60	PAP 23060 P20	MB 23060 DX
SF-2 3625	36x40x25	PAP 3625 P20	MB 3625 DX	SF-2 23070	230x235x70	PAP 23070 P20	MB 23070 DX
SF-2 3630	36x40x30	PAP 3630 P20	MB 3630 DX	SF-2 23080	230x235x80	PAP 23080 P20	MB 23080 DX
SF-2 3635	36x40x35	PAP 3635 P20	MB 3635 DX	SF-2 23090	230x235x90	PAP 23090 P20	MB 23090 DX
SF-2 3640	36x40x40	PAP 3640 P20	MB 3640 DX	SF-2 230100	230x235x100	PAP 230100 P20	MB 230100 DX
SF-2 3645	36x40x45	PAP 3645 P20	MB 3645 DX	SF-2 230110	230x235x110	PAP 230110 P20	MB 230110 DX
SF-2 3650	36x40x50	PAP 3650 P20	MB 3650 DX	SF-2 230120	230x235x120	PAP 230120 P20	MB 230120 DX

SF-2 3812	38x42x12	PAP 3812 P20	MB 3812 DX	SF-2 230130	230x235x130	PAP 230130 P20	MB 230130 DX
SF-2 3815	38x42x15	PAP 3815 P20	MB 3815 DX	SF-2 230140	230x235x140	PAP 230140 P20	MB 230140 DX
SF-2 3820	38x42x20	PAP 3820 P20	MB 3820 DX	SF-2 230150	230x235x150	PAP 230150 P20	MB 230150 DX
SF-2 3825	38x42x25	PAP 3825 P20	MB 3825 DX	SF-2 23560	235x240x60	PAP 23560 P20	MB 23560 DX
SF-2 3830	38x42x30	PAP 3830 P20	MB 3830 DX	SF-2 23570	235x240x70	PAP 23570 P20	MB 23570 DX
SF-2 3835	38x42x35	PAP 3835 P20	MB 3835 DX	SF-2 23580	235x240x80	PAP 23580 P20	MB 23580 DX
SF-2 3840	38x42x40	PAP 3840 P20	MB 3840 DX	SF-2 23590	235x240x90	PAP 23590 P20	MB 23590 DX
SF-2 3845	38x42x45	PAP 3845 P20	MB 3845 DX	SF-2 235100	235x240x100	PAP 235100 P20	MB 235100 DX
SF-2 3850	38x42x50	PAP 3850 P20	MB 3850 DX	SF-2 235110	235x240x110	PAP 235110 P20	MB 235110 DX
SF-2 3855	38x42x55	PAP 3855 P20	MB 3855 DX	SF-2 235120	235x240x120	PAP 235120 P20	MB 235120 DX
SF-2 3860	38x42x60	PAP 3860 P20	MB 3860 DX	SF-2 235130	235x240x130	PAP 235130 P20	MB 235130 DX
SF-2 4012	40x44x12	PAP 4012 P20	MB 4012 DX	SF-2 235140	235x240x140	PAP 235140 P20	MB 235140 DX
SF-2 4015	40x44x15	PAP 4015 P20	MB 4015 DX	SF-2 235150	235x240x150	PAP 235150 P20	MB 235150 DX
SF-2 4020	40x44x20	PAP 4020 P20	MB 4020 DX	SF-2 24060	240x245x60	PAP 24060 P20	MB 24060 DX
SF-2 4025	40x44x25	PAP 4025 P20	MB 4025 DX	SF-2 24070	240x245x70	PAP 24070 P20	MB 24070 DX
SF-2 4030	40x44x30	PAP 4030 P20	MB 4030 DX	SF-2 24080	240x245x80	PAP 24080 P20	MB 24080 DX
SF-2 4035	40x44x35	PAP 4035 P20	MB 4035 DX	SF-2 24090	240x245x90	PAP 24090 P20	MB 24090 DX
SF-2 4040	40x44x40	PAP 4040 P20	MB 4040 DX	SF-2 240100	240x245x100	PAP 240100 P20	MB 240100 DX
SF-2 4045	40x44x45	PAP 4045 P20	MB 4045 DX	SF-2 240110	240x245x110	PAP 240110 P20	MB 240110 DX
SF-2 4050	40x44x50	PAP 4050 P20	MB 4050 DX	SF-2 240120	240x245x120	PAP 240120 P20	MB 240120 DX
SF-2 4055	40x44x55	PAP 4055 P20	MB 4055 DX	SF-2 240130	240x245x130	PAP 240130 P20	MB 240130 DX
SF-2 4060	40x44x60	PAP 4060 P20	MB 4060 DX	SF-2 240140	240x245x140	PAP 240140 P20	MB 240140 DX
SF-2 4212	42x46x12	PAP 4212 P20	MB 4212 DX	SF-2 240150	240x245x150	PAP 240150 P20	MB 240150 DX
SF-2 4215	42x46x15	PAP 4215 P20	MB 4215 DX	SF-2 24560	245x250x60	PAP 24560 P20	MB 24560 DX
SF-2 4220	42x46x20	PAP 4220 P20	MB 4220 DX	SF-2 24570	245x250x70	PAP 24570 P20	MB 24570 DX
SF-2 4225	42x46x25	PAP 4225 P20	MB 4225 DX	SF-2 24580	245x250x80	PAP 24580 P20	MB 24580 DX
SF-2 4230	42x46x30	PAP 4230 P20	MB 4230 DX	SF-2 24590	245x250x90	PAP 24590 P20	MB 24590 DX
SF-2 4235	42x46x35	PAP 4235 P20	MB 4235 DX	SF-2 245100	245x250x100	PAP 245100 P20	MB 245100 DX
SF-2 4240	42x46x40	PAP 4240 P20	MB 4240 DX	SF-2 245110	245x250x110	PAP 245110 P20	MB 245110 DX
SF-2 4245	42x46x45	PAP 4245 P20	MB 4245 DX	SF-2 245120	245x250x120	PAP 245120 P20	MB 245120 DX
SF-2 4250	42x46x50	PAP 4250 P20	MB 4250 DX	SF-2 245130	245x250x130	PAP 245130 P20	MB 245130 DX
SF-2 4255	42x46x55	PAP 4255 P20	MB 4255 DX	SF-2 245140	245x250x140	PAP 245140 P20	MB 245140 DX
SF-2 4260	42x46x60	PAP 4260 P20	MB 4260 DX	SF-2 245150	245x250x150	PAP 245150 P20	MB 245150 DX
SF-2 4412	44x48x12	PAP 4412 P20	MB 4412 DX	SF-2 25060	250x255x60	PAP 25060 P20	MB 25060 DX
SF-2 4415	44x48x15	PAP 4415 P20	MB 4415 DX	SF-2 25070	250x255x70	PAP 25070 P20	MB 25070 DX
SF-2 4420	44x48x20	PAP 4420 P20	MB 4420 DX	SF-2 25080	250x255x80	PAP 25080 P20	MB 25080 DX
SF-2 4425	44x48x25	PAP 4425 P20	MB 4425 DX	SF-2 25090	250x255x90	PAP 25090 P20	MB 25090 DX
SF-2 4430	44x48x30	PAP 4430 P20	MB 4430 DX	SF-2 250100	250x255x100	PAP 250100 P20	MB 250100 DX
SF-2 4435	44x48x35	PAP 4435 P20	MB 4435 DX	SF-2 250110	250x255x110	PAP 250110 P20	MB 250110 DX
SF-2 4440	44x48x40	PAP 4440 P20	MB 4440 DX	SF-2 250120	250x255x120	PAP 250120 P20	MB 250120 DX
SF-2 4445	44x48x45	PAP 4445 P20	MB 4445 DX	SF-2 250130	250x255x130	PAP 250130 P20	MB 250130 DX
SF-2 4450	44x48x50	PAP 4450 P20	MB 4450 DX	SF-2 250140	250x255x140	PAP 250140 P20	MB 250140 DX
SF-2 4455	44x48x55	PAP 4455 P20	MB 4455 DX	SF-2 250150	250x255x150	PAP 250150 P20	MB 250150 DX
SF-2 4460	44x48x60	PAP 4460 P20	MB 4460 DX	SF-2 25560	255x260x60	PAP 25560 P20	MB 25560 DX
SF-2 4515	45x50x15	PAP 4515 P20	MB 4515 DX	SF-2 25570	255x260x70	PAP 25570 P20	MB 25570 DX
SF-2 4520	45x50x20	PAP 4520 P20	MB 4520 DX	SF-2 25580	255x260x80	PAP 25580 P20	MB 25580 DX
SF-2 4525	45x50x25	PAP 4525 P20	MB 4525 DX	SF-2 25590	255x260x90	PAP 25590 P20	MB 25590 DX
SF-2 4530	45x50x30	PAP 4530 P20	MB 4530 DX	SF-2 255100	255x260x100	PAP 255100 P20	MB 255100 DX
SF-2 4535	45x50x35	PAP 4535 P20	MB 4535 DX	SF-2 255110	255x260x110	PAP 255110 P20	MB 255110 DX
SF-2 4540	45x50x40	PAP 4540 P20	MB 4540 DX	SF-2 255120	255x260x120	PAP 255120 P20	MB 255120 DX
SF-2 4545	45x50x45	PAP 4545 P20	MB 4545 DX	SF-2 255130	255x260x130	PAP 255130 P20	MB 255130 DX
SF-2 4550	45x50x50	PAP 4550 P20	MB 4550 DX	SF-2 255140	255x260x140	PAP 255140 P20	MB 255140 DX
SF-2 4555	45x50x55	PAP 4555 P20	MB 4555 DX	SF-2 255150	255x260x150	PAP 255150 P20	MB 255150 DX
SF-2 4560	45x50x60	PAP 4560 P20	MB 4560 DX	SF-2 26060	260x265x60	PAP 26060 P20	MB 26060 DX
SF-2 5015	50x55x15	PAP 5015 P20	MB 5015 DX	SF-2 26070	260x265x70	PAP 26070 P20	MB 26070 DX
SF-2 5020	50x55x20	PAP 5020 P20	MB 5020 DX	SF-2 26080	260x265x80	PAP 26080 P20	MB 26080 DX
SF-2 5025	50x55x25	PAP 5025 P20	MB 5025 DX	SF-2 26090	260x265x90	PAP 26090 P20	MB 26090 DX
SF-2 5030	50x55x30	PAP 5030 P20	MB 5030 DX	SF-2 260100	260x265x100	PAP 260100 P20	MB 260100 DX
SF-2 5035	50x55x35	PAP 5035 P20	MB 5035 DX	SF-2 260110	260x265x110	PAP 260110 P20	MB 260110 DX
SF-2 5040	50x55x40	PAP 5040 P20	MB 5040 DX	SF-2 260120	260x265x120	PAP 260120 P20	MB 260120 DX
SF-2 5045	50x55x45	PAP 5045 P20	MB 5045 DX	SF-2 260130	260x265x130	PAP 260130 P20	MB 260130 DX
SF-2 5050	50x55x50	PAP 5050 P20	MB 5050 DX	SF-2 260140	260x265x140	PAP 260140 P20	MB 260140 DX
SF-2 5055	50x55x55	PAP 5055 P20	MB 5055 DX	SF-2 260150	260x265x150	PAP 260150 P20	MB 260150 DX
SF-2 5060	50x55x60	PAP 5060 P20	MB 5060 DX	SF-2 26560	265x270x60	PAP 26560 P20	MB 26560 DX
SF-2 5065	50x55x65	PAP 5065 P20	MB 5065 DX	SF-2 26570	265x270x70	PAP 26570 P20	MB 26570 DX
SF-2 5070	50x55x70	PAP 5070 P20	MB 5070 DX	SF-2 26580	265x270x80	PAP 26580 P20	MB 26580 DX
SF-2 5515	55x60x15	PAP 5515 P20	MB 5515 DX	SF-2 26590	265x270x90	PAP 26590 P20	MB 26590 DX
SF-2 5520	55x60x20	PAP 5520 P20	MB 5520 DX	SF-2 265100	265x270x100	PAP 265100 P20	MB 265100 DX
SF-2 5525	55x60x25	PAP 5525 P20	MB 5525 DX	SF-2 265110	265x270x110	PAP 265110 P20	MB 265110 DX
SF-2 5530	55x60x30	PAP 5530 P20	MB 5530 DX	SF-2 265120	265x270x120	PAP 265120 P20	MB 265120 DX
SF-2 5535	55x60x35	PAP 5535 P20	MB 5535 DX	SF-2 265130	265x270x130	PAP 265130 P20	MB 265130 DX
SF-2 5540	55x60x40	PAP 5540 P20	MB 5540 DX	SF-2 265140	265x270x140	PAP 265140 P20	MB 265140 DX
SF-2 5545	55x60x45	PAP 5545 P20	MB 5545 DX	SF-2 265150	265x270x150	PAP 265150 P20	MB 265150 DX
SF-2 5550	55x60x50	PAP 5550 P20	MB 5550 DX	SF-2 27060	270x275x60	PAP 27060 P20	MB 27060 DX
SF-2 5555	55x60x55	PAP 5555 P20	MB 5555 DX	SF-2 27070	270x275x70	PAP 27070 P20	MB 27070 DX
SF-2 5560	55x60x60	PAP 5560 P20	MB 5560 DX	SF-2 27080	270x275x80	PAP 27080 P20	MB 27080 DX
SF-2 5565	55x60x65	PAP 5565 P20	MB 5565 DX	SF-2 27090	270x275x90	PAP 27090 P20	MB 27090 DX
SF-2 5570	55x60x70	PAP 5570 P20	MB 5570 DX	SF-2 270100	270x275x100	PAP 270100 P20	MB 270100 DX
SF-2 6015	60x65x15	PAP 6015 P20	MB 6015 DX	SF-2 270110	270x275x110	PAP 270110 P20	MB 270110 DX
SF-2 6020	60x65x20	PAP 6020 P20	MB 6020 DX	SF-2 270120	270x275x120	PAP 270120 P20	MB 270120 DX
SF-2 6025	60x65x25	PAP 6025 P20	MB 6025 DX	SF-2 270130	270x275x130	PAP 270130 P20	MB 270130 DX
SF-2 6030	60x65x30	PAP 6030 P20	MB 6030 DX	SF-2 270140	270x275x140	PAP 270140 P20	MB 270140 DX
SF-2 6035	60x65x35	PAP 6035 P20	MB 6035 DX	SF-2 270150	270x275x150	PAP 270150 P20	MB 270150 DX
SF-2 6040	60x65x40	PAP 6040 P20	MB 6040 DX	SF-2 27540	275x280x40	PAP 27540 P20	MB 27540 DX
SF-2 6045	60x65x45	PAP 6045 P20	MB 6045 DX	SF-2 27560	275x280x60	PAP 27560 P20	MB 27560 DX
SF-2 6050	60x65x50	PAP 6050 P20	MB 6050 DX	SF-2 27570	275x280x70	PAP 27570 P20	MB 27570 DX
SF-2 6055	60x65x55	PAP 6055 P20	MB 6055 DX	SF-2 27580	275x280x80	PAP 27580 P20	MB 27580 DX
SF-2 6060	60x65x60	PAP 6060 P20	MB 6060 DX	SF-2 27590	275x280x90	PAP 27590 P20	MB 27590 DX

SF-2 6065	60x65x65	PAP 6065 P20	MB 6065 DX	SF-2 275100	275x280x100	PAP 275100 P20	MB 275100 DX
SF-2 6070	60x65x70	PAP 6070 P20	MB 6070 DX	SF-2 275110	275x280x110	PAP 275110 P20	MB 275110 DX
SF-2 6075	60x65x75	PAP 6075 P20	MB 6075 DX	SF-2 275120	275x280x120	PAP 275120 P20	MB 275120 DX
SF-2 6080	60x65x80	PAP 6080 P20	MB 6080 DX	SF-2 275130	275x280x130	PAP 275130 P20	MB 275130 DX
SF-2 6085	60x65x85	PAP 6085 P20	MB 6085 DX	SF-2 275140	275x280x140	PAP 275140 P20	MB 275140 DX
SF-2 6325	63x68x25	PAP 6325 P20	MB 6325 DX	SF-2 275150	275x280x150	PAP 275150 P20	MB 275150 DX
SF-2 6090	60x65x90	PAP 6090 P20	MB 6090 DX	SF-2 28060	280x285x60	PAP 28060 P20	MB 28060 DX
SF-2 6515	65x70x15	PAP 6515 P20	MB 6515 DX	SF-2 28070	280x285x70	PAP 28070 P20	MB 28070 DX
SF-2 6520	65x70x20	PAP 6520 P20	MB 6520 DX	SF-2 28080	280x285x80	PAP 28080 P20	MB 28080 DX
SF-2 6530	65x70x30	PAP 6530 P20	MB 6530 DX	SF-2 28090	280x285x90	PAP 28090 P20	MB 28090 DX
SF-2 6535	65x70x35	PAP 6535 P20	MB 6535 DX	SF-2 280100	280x285x100	PAP 280100 P20	MB 280100 DX
SF-2 6540	65x70x40	PAP 6540 P20	MB 6540 DX	SF-2 280110	280x285x110	PAP 280110 P20	MB 280110 DX
SF-2 6550	65x70x50	PAP 6550 P20	MB 6550 DX	SF-2 280120	280x285x120	PAP 280120 P20	MB 280120 DX
SF-2 6560	65x70x60	PAP 6560 P20	MB 6560 DX	SF-2 280130	280x285x130	PAP 280130 P20	MB 280130 DX
SF-2 6570	65x70x70	PAP 6570 P20	MB 6570 DX	SF-2 280140	280x285x140	PAP 280140 P20	MB 280140 DX
SF-2 6580	65x70x80	PAP 6580 P20	MB 6580 DX	SF-2 280150	280x285x150	PAP 280150 P20	MB 280150 DX
SF-2 6590	65x70x90	PAP 6590 P20	MB 6590 DX	SF-2 28560	285x290x60	PAP 28560 P20	MB 28560 DX
SF-2 7015	70x75x15	PAP 7015 P20	MB 7015 DX	SF-2 28570	285x290x70	PAP 28570 P20	MB 28570 DX
SF-2 7020	70x75x20	PAP 7020 P20	MB 7020 DX	SF-2 28580	285x290x80	PAP 28580 P20	MB 28580 DX
SF-2 7025	70x75x25	PAP 7025 P20	MB 7025 DX	SF-2 28590	285x290x90	PAP 28590 P20	MB 28590 DX
SF-2 7030	70x75x30	PAP 7030 P20	MB 7030 DX	SF-2 285100	285x290x100	PAP 285100 P20	MB 285100 DX
SF-2 7040	70x75x40	PAP 7040 P20	MB 7040 DX	SF-2 285110	285x290x110	PAP 285110 P20	MB 285110 DX
SF-2 7045	70x75x45	PAP 7045 P20	MB 7045 DX	SF-2 285120	285x290x120	PAP 285120 P20	MB 285120 DX
SF-2 7050	70x75x50	PAP 7050 P20	MB 7050 DX	SF-2 285130	285x290x130	PAP 285130 P20	MB 285130 DX
SF-2 7060	70x75x60	PAP 7060 P20	MB 7060 DX	SF-2 285140	285x290x140	PAP 285140 P20	MB 285140 DX
SF-2 7070	70x75x70	PAP 7070 P20	MB 7070 DX	SF-2 285150	285x290x150	PAP 285150 P20	MB 285150 DX
SF-2 7080	70x75x80	PAP 7080 P20	MB 7080 DX	SF-2 29060	290x295x60	PAP 29060 P20	MB 29060 DX
SF-2 7090	70x75x90	PAP 7090 P20	MB 7090 DX	SF-2 29070	290x295x70	PAP 29070 P20	MB 29070 DX
SF-2 7530	75x80x30	PAP 7530 P20	MB 7530 DX	SF-2 29080	290x295x80	PAP 29080 P20	MB 29080 DX
SF-2 7540	75x80x40	PAP 7540 P20	MB 7540 DX	SF-2 29090	290x295x90	PAP 29090 P20	MB 29090 DX
SF-2 7550	75x80x50	PAP 7550 P20	MB 7550 DX	SF-2 290100	290x295x100	PAP 290100 P20	MB 290100 DX
SF-2 7560	75x80x60	PAP 7560 P20	MB 7560 DX	SF-2 290110	290x295x110	PAP 290110 P20	MB 290110 DX
SF-2 7570	75x80x70	PAP 7570 P20	MB 7570 DX	SF-2 290120	290x295x120	PAP 290120 P20	MB 290120 DX
SF-2 7580	75x80x80	PAP 7580 P20	MB 7580 DX	SF-2 290130	290x295x130	PAP 290130 P20	MB 290130 DX
SF-2 7590	75x80x90	PAP 7590 P20	MB 7590 DX	SF-2 290140	290x295x140	PAP 290140 P20	MB 290140 DX
SF-2 8025	80x85x25	PAP 8025 P20	MB 8025 DX	SF-2 290150	290x295x150	PAP 290150 P20	MB 290150 DX
SF-2 8030	80x85x30	PAP 8030 P20	MB 8030 DX	SF-2 29540	295x300x40	PAP 29540 P20	MB 29540 DX
SF-2 8040	80x85x40	PAP 8040 P20	MB 8040 DX	SF-2 29560	295x300x60	PAP 29560 P20	MB 29560 DX
SF-2 8050	80x85x50	PAP 8050 P20	MB 8050 DX	SF-2 29570	295x300x70	PAP 29570 P20	MB 29570 DX
SF-2 8060	80x85x60	PAP 8060 P20	MB 8060 DX	SF-2 29580	295x300x80	PAP 29580 P20	MB 29580 DX
SF-2 8070	80x85x70	PAP 8070 P20	MB 8070 DX	SF-2 29590	295x300x90	PAP 29590 P20	MB 29590 DX
SF-2 8080	80x85x80	PAP 8080 P20	MB 8080 DX	SF-2 295100	295x300x100	PAP 295100 P20	MB 295100 DX
SF-2 8090	80x85x90	PAP 8090 P20	MB 8090 DX	SF-2 295110	295x300x110	PAP 295110 P20	MB 295110 DX
SF-2 80100	80x85x100	PAP 80100 P20	MB 80100 DX	SF-2 295120	295x300x120	PAP 295120 P20	MB 295120 DX
SF-2 8530	85x90x30	PAP 8530 P20	MB 8530 DX	SF-2 295130	295x300x130	PAP 295130 P20	MB 295130 DX
SF-2 8540	85x90x40	PAP 8540 P20	MB 8540 DX	SF-2 295140	295x300x140	PAP 295140 P20	MB 295140 DX
SF-2 8550	85x90x50	PAP 8550 P20	MB 8550 DX	SF-2 295150	295x300x150	PAP 295150 P20	MB 295150 DX
SF-2 8560	85x90x60	PAP 8560 P20	MB 8560 DX	SF-2 30060	300x305x60	PAP 30060 P20	MB 30060 DX
SF-2 8570	85x90x70	PAP 8570 P20	MB 8570 DX	SF-2 30070	300x305x70	PAP 30070 P20	MB 30070 DX
SF-2 8580	85x90x80	PAP 8580 P20	MB 8580 DX	SF-2 30080	300x305x80	PAP 30080 P20	MB 30080 DX
SF-2 8590	85x90x90	PAP 8590 P20	MB 8590 DX	SF-2 30090	300x305x90	PAP 30090 P20	MB 30090 DX
SF-2 85100	85x90x100	PAP 85100 P20	MB 85100 DX	SF-2 300100	300x305x100	PAP 300100 P20	MB 300100 DX
SF-2 9020	90x95x20	PAP 9020 P20	MB 9020 DX	SF-2 300110	300x305x110	PAP 300110 P20	MB 300110 DX
SF-2 9025	90x95x25	PAP 9025 P20	MB 9025 DX	SF-2 300120	300x305x120	PAP 300120 P20	MB 300120 DX
SF-2 9030	90x95x30	PAP 9030 P20	MB 9030 DX	SF-2 300130	300x305x130	PAP 300130 P20	MB 300130 DX
SF-2 9040	90x95x40	PAP 9040 P20	MB 9040 DX	SF-2 300140	300x305x140	PAP 300140 P20	MB 300140 DX
SF-2 9050	90x95x50	PAP 9050 P20	MB 9050 DX	SF-2 300150	300x305x150	PAP 300150 P20	MB 300150 DX
SF-2 9060	90x95x60	PAP 9060 P20	MB 9060 DX				
SF-2 9070	90x95x70	PAP 9070 P20	MB 9070 DX				
SF-2 9080	90x95x80	PAP 9080 P20	MB 9080 DX				



SF-1WD/SF-2WD 止推垫片标准公制尺寸 SF-1WD/SF-2WD Thrust Washer Standard Metric Size

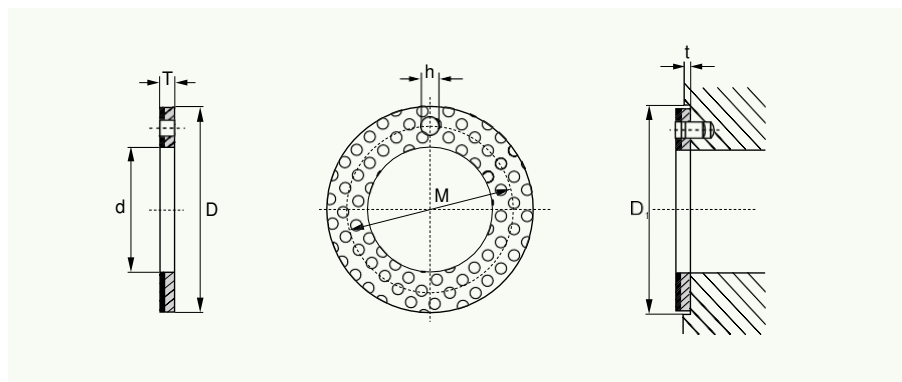

单位 Unit: mm

轴径 Axle	型号规格 Designation	垫片尺寸 Washer Dimension				安装尺寸 Installation Size		
		d +0.25	D -0.25	T -0.05	M ± 0.125	h ^{+0.40} _{+0.10}	t ± 0.20	D ₁ +0.12
8	WD 10	10	20	1.5	15	1.5	1.0	20
10	WD 12	12	24		18			24
12	WD 14	14	26		20			26
14	WD 16	16	30		23	2.0		30
16	WD 18	18	32	25	32			
18	WD 20	20	36	2.0	28	3.0		36
20	WD 22	22	38		30			38
22	WD 24	24	42		33			42
24	WD 26	26	44		35			44
26	WD 28	28	48		38			48
30	WD 32	32	54	2.0	43	4.0	54	
36	WD 38	38	62		50		62	
40	WD 42	42	66		54		66	
46	WD 48	48	74		61		74	
50	WD 52	52	78	2.0	65		1.5	78
60	WD 62	62	90		76	90		

SF-1/SF-2 板材标准公制尺寸 SF-1/SF-2 Strip Standard Metric Size

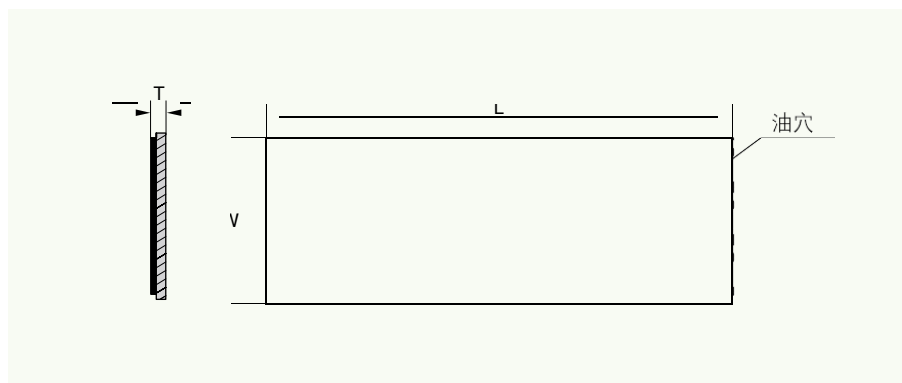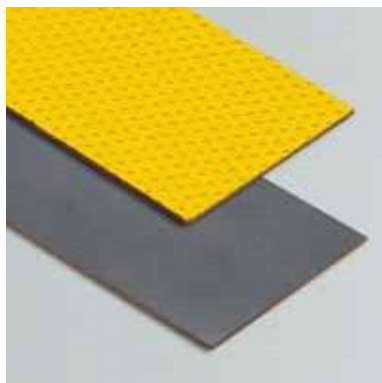

单位 Unit: mm

代号 Code number	长度(L) ± 1	宽度(W) ± 1	壁厚(T)-0.05
SF-1/SF-2	500	150	1.0
SF-1/SF-2	500	150	1.5
SF-1/SF-2	500	150	2.0
SF-1/SF-2	500	150	2.5

JF-800 系列双金属轴承 JF-800 Bimetal Bearings



◎JF-800 以碳钢为基体，表面烧结铜粉，适用于高载低速下的旋 转、摇摆运动，铜粉面可根据要求加工出各种油孔、油槽。目前已 广泛使用于矿山机械、汽车、摩托车、建筑机械、农用机械、轧钢 机械等。

◎Steel backed Lead bronze lined bearing material for lubricated applications, high load capacity and good fatigue properties, have been widely used in automotive, common industrial like steering gear, power steering, pedal bushes, king-pin bushes, tailgate pivots, mechanical handling, lifting equipment, hydraulic motors, agricultural machines etc.

成分、特性、用途

Chemical Compositions, Characteristics and Application

材料型号 Types of Material	铜合金牌号 Specifications of Bronze alloy	化学成分% Chemical Compositions	合金层硬度 Alloy Hrdness	特性与用途 Characteristics and Application
JF-930	CuSn6.5P0.1	铜锡磷 Cu Sn P 93 6.0~7.0 0.1~0.25	HB(60-90)	无铅 Lead Free
JF-850	CuSn6Zn6Pb3	铜锡锌铅 Cu Sn Zn Pb 85 6 6 3	HB(40-80)	启动电机 Starting Motor
JF-800	CuPb10Sn10	铜铅锡 Cu Pb Sn Zn 80 10 10	HB(60-90)	在铜合金中最强的一种，应用范围广 The strongest material type, wide application scope.
JF-750	CuPb24Sn1	铜铅锡 Cu Pb Sn 75 24 1	HB(45-70)	连杆摇臂 Link Arm
JF-720	CuPb24Sn4	铜铅锡 Cu Pb Sn 72 24 4	HB(45-70)	连杆摇臂 Link Arm

技术参数 Tech.Data

最大荷载 Max.Load	静承载 Static	250N/mm ²	屈服强度 Yield strength	240N/mm ²
	动承载 Dynamic	140N/mm ²	使用温度 Temp.limit	-40℃~+250℃
最高线速度 Max. linear speed		2m/s	摩擦系数 Friction Coeff.	0.08~0.20
最大PV值 PV limit		2.8N/mm ² ·m/s	导热系数 Thermal conductivity	60W(m·k)-1
抗剪切强度 Shear resistance strength		350N/mm ²	导热系数 Thermal conductivity	14·10 ⁻⁶ K ⁻¹


JF-800 双金属内孔加工与不可加工厚度公差

Wall Thickness of The Machinable and Non-machinable Bore of JF-800 Bearings and Their Tolerances

公称厚度 Nominal Thickness	内孔不可加工厚度公差 Tolerances of Series B (non-machinable)	内孔可加工厚度公差 Tolerances of Series C (non-machinable)
1	-0.025	+0.25 +0.15 +0.25
1.5	-0.030	+0.15 +0.25 +0.15
2	-0.035	+0.25 +0.15 +0.30
2.5	-0.040	+0.15 +0.30 +0.15
3	-0.045	+0.30 +0.15 +0.30
3.5	-0.050	+0.15 +0.30 +0.15

JF-800 双金属轴承标准公制尺寸

JF-800 Bimetal Bearings Standard Metric Size

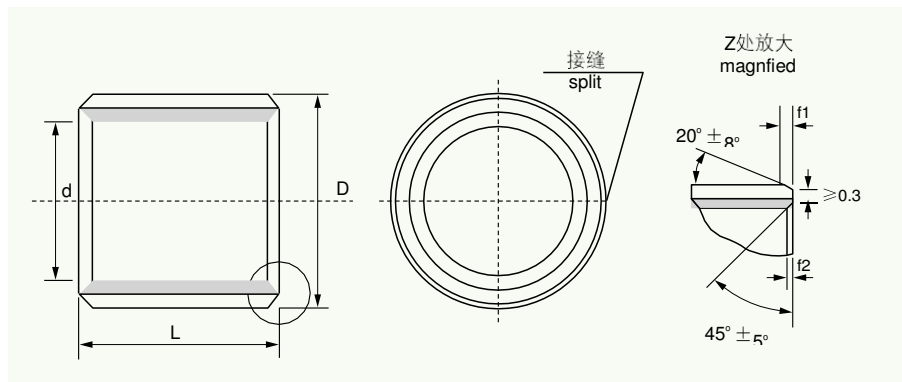

单位 unit:mm

d	D	壁厚 Wall Thickness	外径 O.D Tolerance	内径公差 I.D.(H8) Tolerance	配合座孔 H7 Housing Bore	轴径 f ₇ Journal Diameter	f ₁	f ₂	L -0.40											
									10	15	20	25	30	40	50	60	80	90	100	
10	12	1 -0.025	12 ^{+0.065} _{+0.030}	10 ^{+0.022} _{+0.000}	10 ^{-0.013} _{-0.028}	12 ^{+0.018}	0.5	0.3	1010	1015	1020									
12	14		14 ^{+0.065} _{+0.030}	12 ^{+0.027} _{+0.000}	12 ^{-0.016} _{-0.034}	14 ^{+0.018}	0.5	0.3	1210	1215	1220									
14	16		16 ^{+0.065} _{+0.030}	14 ^{+0.027} _{+0.000}	14 ^{-0.016} _{-0.034}	16 ^{+0.018}	0.5	0.3	1410	1415	1420									
15	17		17 ^{+0.065} _{+0.030}	15 ^{+0.027} _{+0.000}	15 ^{-0.016} _{-0.034}	17 ^{+0.018}	0.5	0.3	1510	1515	1520									
16	18		18 ^{+0.075} _{+0.035}	16 ^{+0.027} _{+0.000}	16 ^{-0.016} _{-0.034}	18 ^{+0.018}	0.8	0.4	1610	1615	1620									
18	20	1.5 -0.030	20 ^{+0.075} _{+0.035}	18 ^{+0.033} _{+0.000}	18 ^{-0.016} _{-0.034}	20 ^{+0.021}	0.8	0.4	1810	1815	1820	1825								
20	23		23 ^{+0.075} _{+0.035}	20 ^{+0.033} _{+0.000}	20 ^{-0.020} _{-0.041}	23 ^{+0.021}	0.8	0.4	2010	2015	2020	2025								
22	25		25 ^{+0.075} _{+0.035}	22 ^{+0.033} _{+0.000}	22 ^{-0.020} _{-0.041}	25 ^{+0.021}	0.8	0.4	2210	2215	2220	2225								
24	27		27 ^{+0.075} _{+0.035}	24 ^{+0.033} _{+0.000}	24 ^{-0.020} _{-0.041}	27 ^{+0.021}	1.0	0.5	2410	2415	2420		2430							
25	28		28 ^{+0.075} _{+0.035}	25 ^{+0.033} _{+0.000}	25 ^{-0.020} _{-0.041}	28 ^{+0.021}	1.0	0.5		2515	2520	2525	2530							
26	30	2 -0.035	30 ^{+0.075} _{+0.035}	26 ^{+0.033} _{+0.000}	26 ^{-0.020} _{-0.041}	30 ^{+0.021}	1.0	0.5		2615	2620	2625	2630							
28	32		32 ^{+0.085} _{+0.045}	28 ^{+0.033} _{+0.000}	28 ^{-0.020} _{-0.041}	32 ^{+0.025}	1.0	0.5		2815	2820	2825	2830	2840						
30	34		34 ^{+0.085} _{+0.045}	30 ^{+0.039} _{+0.000}	30 ^{-0.020} _{-0.041}	34 ^{+0.025}	1.2	0.6		3015	3020	3025	3030	3040						
32	36		36 ^{+0.085} _{+0.045}	32 ^{+0.039} _{+0.000}	32 ^{-0.025} _{-0.050}	36 ^{+0.025}	1.2	0.6		3215	3220	3225	3230	3240						
35	39		39 ^{+0.085} _{+0.045}	35 ^{+0.039} _{+0.000}	35 ^{-0.025} _{-0.050}	39 ^{+0.025}	1.2	0.6			3520	3525	3530	3540	3550					
38	42	2.5 -0.040	42 ^{+0.085} _{+0.045}	38 ^{+0.039} _{+0.000}	38 ^{-0.025} _{-0.050}	42 ^{+0.025}	1.2	0.6			3825	3825	3830	3840	3850					
40	44		44 ^{+0.085} _{+0.045}	40 ^{+0.039} _{+0.000}	40 ^{-0.025} _{-0.050}	44 ^{+0.025}	1.2	0.6			4020	4025	4030	4040	4050					
45	50		50 ^{+0.085} _{+0.045}	45 ^{+0.039} _{+0.000}	45 ^{-0.025} _{-0.050}	50 ^{+0.025}	1.5	1.0			4520	4525	4530	4540	4550					
50	55		55 ^{+0.100} _{+0.050}	50 ^{+0.039} _{+0.000}	50 ^{-0.025} _{-0.050}	55 ^{+0.030}	1.5	1.0					5030	5040	5050	5060				
55	60		60 ^{+0.100} _{+0.050}	55 ^{+0.046} _{+0.000}	55 ^{-0.030} _{-0.060}	60 ^{+0.030}	1.5	1.0					5530	5540	5550	5560				
60	65	2.5 -0.040	65 ^{+0.100} _{+0.050}	60 ^{+0.046} _{+0.000}	60 ^{-0.030} _{-0.060}	65 ^{+0.030}	1.5	1.0					6030	6040	6050	6060				
65	70		70 ^{+0.100} _{+0.050}	65 ^{+0.046} _{+0.000}	65 ^{-0.030} _{-0.060}	70 ^{+0.030}	1.5	1.0					6530	6540	6550	6560				
70	75		75 ^{+0.100} _{+0.050}	70 ^{+0.046} _{+0.000}	70 ^{-0.030} _{-0.060}	75 ^{+0.030}	1.5	1.0					7030	7040	7050	7060	7080			
75	80		80 ^{+0.100} _{+0.050}	75 ^{+0.046} _{+0.000}	75 ^{-0.030} _{-0.060}	80 ^{+0.035}	1.5	1.0					7530	7540	7550	7560				
80	85		85 ^{+0.120} _{+0.070}	80 ^{+0.054} _{+0.000}	80 ^{-0.030} _{-0.060}	85 ^{+0.035}	1.5	1.0						8040	8050	8060	8080			

FB090 系列青铜卷制轴承 **FB090 Bronze-Wrapped Bearings**



产品概述

◎FB090 系列青铜卷制轴承套是我公司在钢-铜铅双金属轴套产品基础上开发设计的新一代轴套。该产品在国外应用十分普遍，随着我国引进机械的设备新机种的日益增多，设计师们寻找新型摩擦材料、轴套的要求也日益需要，因此该产品在我们机械制造中有着广泛应用领域和实用价值。

◎FB090 系列轴套最大特点是薄壁结构，不占据很大的装配空间。轴套材料采用特殊配方高密度铜合金带材。它与传统的铺型铜套相比，具有密度高、无气缩孔、承载能力大，又有耐磨耐疲劳等优点。轴套制造采用先进的工装模具，可在带材摩擦面上加工出适用各种工程条件的油穴、油坑、油槽，从而使轴套在使用可储存大量润滑油脂，延长加油间隔时间，有效的提高了使用寿命。

◎FB090 系列轴承广泛应用与农业机械、建筑机械、工程机械、汽车行业等。

Product Overview

◎FB090 series bronze rolled bushing is our new generation bushing based upon steel-bronze lead double metal bushings. This product is widely applied overseas. With the increase of our country's introduction of foreign machineries, designer's requirements on new abrasive materials and bushings are accordingly increasing. Therefore, our products see a wide application scope and practical value in machinery production.

◎The major feature of FB090 series bushing is their thin-wall structure, which doesn't take up too large assembly space. Specially formulated high-density bronze alloy bands are used for the building of the bushing, which, compared with traditional bushings, is featured in the high

density, no shrinkage blowholes, high load sustainability and anti-wearing and anti-fatigue. The production of the bushing is by means of advanced fixture and molds, able to make oil holes, hole dents and grooves on the friction surfaces of the bands to suit various engineering applications, making it possible for the bushing to store large amount of lubricating grease when working. Therefore, the lubrication interval is prolonged and the service hours are effectively lengthened.

◎FB090 series bearings are widely used in applications such as agricultural machineries, construction machineries, engineering machineries and automobile industry.

FB090 系列产品的优点

1. 节约大量铜材、节省车制铜套工时；
2. 与车制轴套、滚动轴承相比其重量轻、成本低；
3. 可在摩擦面加工出各种有穴、有坑、储存一定油脂，延长加油的时间是铜套的 5 倍
4. 极高的承载能力，特别是适用于粗糙的摩擦面： 可供产品：直套、止推垫片、翻边衬套、轴瓦、滑板、钢套组合件。

FB090 Product Benefits

1. Saving large amount of bronze material and save the working hours normally spent for lathing the bronze bushing.
2. Compared with lathed bushings and roller bearings, it is lights and more cost-effective.
3. Various holes and dents can be made on the friction surface for grease storage, prolonging the lubrication interval to 5 times as long as required by the bronze bushing.

4. Extremely high load sustainability, especially suitable for coarse abrasion surfaces.

Standard products available: straight bushings, thrust plates and pressure bearings.


Non-standard products available: straight bushings, thrust plates, planks, bearing bushings, slide plates and steel bushing assembly.

FB090 轴承简介 FB090 Bearing Introduction


材料结构 Material Structure

◎采用高密度青铜卷制成形或球形油袋、油穴特殊合成内部表面以减少磨损延长使用时间并且很好的做到防腐功能。


◎High-density bronze is rolled into shape or oil bags and oil holes are specially integrated into the inner surface to reduce the wearing and prolong the service hours. Besides, it has excellent anti-corrosion functions.



轴衬套内
Inside the bush of the shaft
菱形油穴 $r \leq \phi 22$
Rhomb oil holes $r \leq \phi 22$



轴衬套内
Inside the bush of the shaft
菱形油穴 $r > \phi 22$
Rhomb oil holes $r > \phi 22$



形成菱形
Forming a rhomb

化学成分 Chemical Composition

材料Material	铜 Cu	锡 Sn	磷 P	铅 Pb	锌 Zn
CuSn8	91.3%	8.5%	0.2%	-	-

物理特性 Physical Property

型号Type	密度Density	散热热胀Heat Emission and Expansion	热传导Heat Conducting	硬度Hardness	抗压强度Extensile	延伸率Extensile
FB090	8.8g/cm ³	$18.5 \times 10^{-2} \times K^{-1}$	58W(m·k)	90~120HB	470N/mm ²	40%

应用范围 Application scope

此系列轴承广泛应用与农用、建设机械以及工程机械等。

This series of bearing is widely applied to agricultural, construction and engineering machineries, etc.

油穴类别(依据 DIW1494/ISO3457)。

Categories of oil holes (As per to DIW1494/ISO3457)。

标准衬套公差 (依据 DIW W91/1503547) Standard tolerance for bushes (As per to DIW W91/1503547)

标准直径Standard Dia.	衬套外径尺寸O.D.Size	相配座孔Housing Bore	衬套内径尺寸I.D.Size	相配轴径Matching Shaft Diameter
10~18	+0.065 +0.030	+0.018 0	+0.046 0	- 0.016 - 0.043
18~30	+0.075 +0.035	+0.021 0	+0.052 0	- 0.020 - 0.020
30~50	+0.085 +0.045	+0.025 0	+0.062 0	- 0.025 - 0.064
50~80	+0.100 +0.055	+0.030 0	+0.074 0	- 0.030 - 0.076
80~120	+0.120 +0.070	+0.035 0	+0.087 0	- 0.036 - 0.090
120~180	+0.170 +0.100	+0.400 0	+0.100 0	- 0.043 - 0.106
180~250	+0.210 +0.130	+0.046 0	+0.115 0	- 0.050 - 0.122
250~315	+0.260 +0.170	+0.052 0	+0.130 0	- 0.056 - 0.137



FB092 系列青铜卷制轴承 FB092 Bronze-Wrapped Bearings

产品概述

◎FB092系列青铜卷制轴承是与FB090材料结构相同，我单位根据国外同类产品基础上开发出的新一代产品轴套，能改良产品设计、替代原有铜套，能降低采购成本，因此产品在我们机械制造中有着广泛实用价值和应用领域。

◎FB092系列轴套最大特点是薄壁结构，不占据很大的装配空间。轴套材料采用特殊配方高密度铜合金带材。它与传统的铺型铜套相

比，可在带材摩擦面上加工出适用各种工程条件的油穴、油坑、油槽，排列润滑通孔，从而使轴套在使用可储存大量润滑油脂，延长加油间隔时间，有效的提高了使用寿命。

◎FB092系列轴承广泛应用与农业机械、建筑机械、工程机械、高载低速场合等。

Product Overview

◎FB092 series bronze rolled bushing is our new generation bushing based upon steel-bronze lead double metal bushings. This product is widely applied overseas. With the increase of our country's introduction of foreign machineries, designer's requirements on new abrasive materials and bushings are accordingly increasing. Therefore, our products see a wide application scope and practical value in machinery production.

◎The major feature of FB092 series bushing is their thin-wall structure, which doesn't take up too large assembly space. Specially formulated high-density bronze alloy bands are used for the building of the bushing, which, compared with traditional bushings, is featured in the high

density, no shrinkage blowholes, high load sustainability and anti-wearing and anti-fatigue. The production of the bushing is by means of advanced fixture and molds, able to make oil holes, hole dents and grooves on the friction surfaces of the bands to suit various engineering applications, making it possible for the bushing to store large amount of lubricating grease when working. Therefore, the lubrication interval is prolonged and the service hours are effectively lengthened.

◎FB092 series bearings are widely used in applications such as agricultural machineries, construction machineries, engineering machineries and automobile industry.

FB092 系列产品的优点

1. 节约大量铜材、节省车制铜套工时；
 2. 与车制轴套、滚动轴承相比其重量轻、成本低；
 3. 可在摩擦面加工出各种有穴、有坑、储存一定油脂，延长加油的时间是铜套的5倍
 4. 极高的承载能力，特别是适用于粗糙的摩擦面；
- 可供标准产品：直套、翻边衬套、组合钢套。

FB092 Product Benefits


1. Saving large amount of bronze material and save the working hours normally spent for lathing the bronze bushing.
2. Compared with lathed bushings and roller bearings, it is lights and more cost-effective.
3. Various holes and dents can be made on the friction surface for grease storage, prolonging the lubrication interval to 5 times as long as required by the bronze bushing.

4. Extremely high load sustainability, especially suitable for coarse abrasion surfaces.


Standard products available: straight bushings, thrust plates and pressure bearings.

Non-standard products available: straight bushings, thrust plates, planks, bearing bushings, slide plates and steel bushing assembly.

FB092 轴承简介 FB092 Bearing Introduction

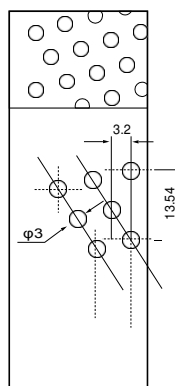

轴承内部 球形
内径 $r \leq \phi 25$

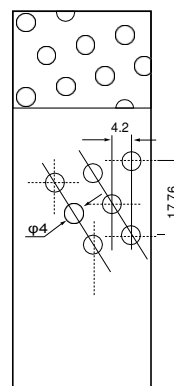

轴承球形 内径
 $r > \phi 25$

化学成分 Chemical Composition

材料Material	铜 Cu	锡 Sn	磷 P	铅 Pb	锌 Zn
CuSn8	91.3%	8.5%	0.2%	-	-

物理特性 Physical Property

型号 Type	密度 Density	散热热胀 Heat Emission and Expansion	热传导 Heat Conducting	硬度 Hardness	抗压强度 Extensile	延伸率 Extensile
FB092	8.8g/cm ³	$18.5 \times 10^{-2} \times K^{-1}$	58W(m·k)	90~120HB	470N/mm ²	40%

应用范围 Application scope

此系列轴承广泛应用与农用、建设机械以及工程机械等。

This series of bearing is widely applied to agricultural, construction and engineering machineries, etc.

标准衬套公差 (依据 DIW W91/1503547) Standard tolerance for bushes (As per to DIW W91/1503547)

标准直径 Standard Dia.	衬套外径尺寸 O.D.Size	相配座孔 Housing Bore	衬套内径尺寸 I.D.Size	相配轴径 Matching Shaft Diameter
10~18	+0.065 +0.030	+0.018 0	+0.046 0	- 0.016 - 0.043
18~30	+0.075 +0.035	+0.021 0	+0.052 0	- 0.020 - 0.020
30~50	+0.085 +0.045	+0.025 0	+0.062 0	- 0.025 - 0.064
50~80	+0.100 +0.055	+0.030 0	+0.074 0	- 0.030 - 0.076
80~120	+0.120 +0.070	+0.035 0	+0.087 0	- 0.036 - 0.090
120~180	+0.170 +0.100	+0.400 0	+0.100 0	- 0.043 - 0.106
180~250	+0.210 +0.130	+0.046 0	+0.115 0	- 0.050 - 0.122
250~315	+0.260 +0.170	+0.052 0	+0.130 0	- 0.056 - 0.137

FB09G 系列青铜卷制轴承 **FB09G Bronze-Wrapped Bearings**



材料结构 Material Structure

◎与FB090具有相同的生产工艺及使用场合，其基体为青铜基板，在其菱形油穴内填充了以石墨为主的固体润滑剂，使产品在起始运用阶段及过程中能有更低的摩擦系数，在短时间断油的情况下仍能保持良好的工作状态。因此被广泛使用在工程机械、齿轮箱传动部件、汽机车离合器等高载中速部位、户外高空设备的转动部位。

◎The same produce process and application except overlay the solid lubricants into the diamond shaped lubrication indents on the bearing surface, which will offer good friction at the start and process works and keep good condition even no oil giving at short time. So can be used in construction machines, gears, automotive clutch pads etc.

技术参数 Tech.Data

最大承载压力	Load capacity	140N/mm ²
适应温度范围	Temperature limit	-100℃~+250℃
最高滑动速度	Speed limit	1.5M/s
摩擦系数	Friction clef	0.06~0.25
允许最高PV值(干)	PV limit (dry)	2.6N/mm ² ·m/s
允许最高PV值(油)	PV limit (oil)	15N/mm ² ·m/s

可供形式 Availability

直套、止推垫片、滑板及其它非标品部件等。


Cylindrical bushes, thrust washers, strip and non-standard parts as the clients supplied drawing etc.

公差 Tolerance

一般推荐座孔公差为H7，轴径公差为f7。

Recommend housing tolerance H7 and the shaft as f7.

FB090/FB092/FB09G 青铜卷制轴承标准公制尺寸 FB090/FB092/FB09G Bronze-Wrapped Bearings Standard Metric Size

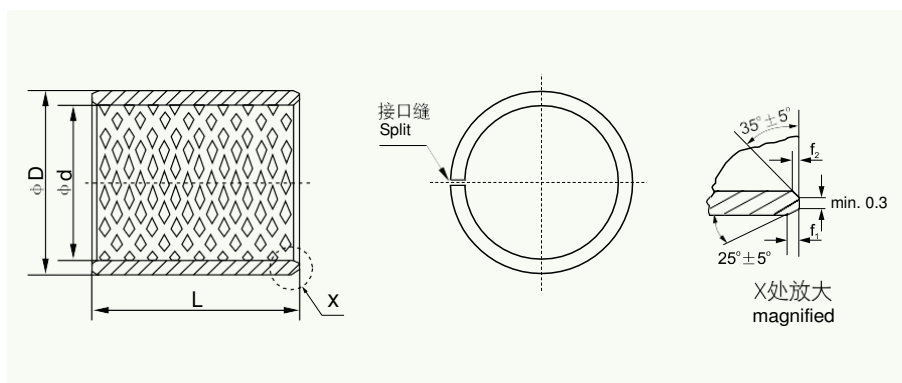

单位 Unit: mm

d	D	相配轴径 Shaft Dia. f ₇	座孔 Housing H7	壁厚 Wall Thickness		f ₁	f ₂	L ⁰ / _{-0.40}									
				最小 Min.	最大 Max.			6	8	10	12	15	20	25	30	40	50
6	8	6 ^{-0.013} / _{-0.028}	8 +0.015					0606	0608	0610							
8	10	8 ^{-0.013} / _{-0.028}	10 +0.015					0806	0808	0810	0812	0815					
10	12	10 ^{-0.016} / _{-0.034}	12 +0.018					1006	1008	1010	1012	1015	1020				
12	14	12 ^{-0.016} / _{-0.034}	14 +0.018					1206	1208	1210	1212	1215	1220	1225			
13	15	13 ^{-0.016} / _{-0.034}	15 +0.018	0.980	1.005	0.6	0.3			1310			1320				
14	16	14 ^{-0.016} / _{-0.034}	16 +0.018							1410	1412	1415	1420	1425			
15	17	15 ^{-0.016} / _{-0.034}	17 +0.018							1510	1512	1515	1520	1525			
16	18	16 ^{-0.016} / _{-0.034}	18 +0.018							1610	1612	1615	1620	1625			
17	19	17 ^{-0.016} / _{-0.034}	19 +0.021							1710	1712		1720				
18	20	18 ^{-0.016} / _{-0.034}	20 +0.021							1810	1812	1815	1820	1825			
20	23	20 ^{-0.020} / _{-0.041}	23 +0.021							2010	2012	2015	2020	2025	2030		
22	25	22 ^{-0.020} / _{-0.041}	25 +0.021	1.475	1.505	0.6	0.4			2210	2212	2215	2220	2225	2230		
24	27	24 ^{-0.020} / _{-0.041}	27 +0.021									2415	2420	2425	2430		
25	28	25 ^{-0.020} / _{-0.041}	28 +0.021							2510	2512	2515	2520	2525	2530	2540	2550
28	32	28 ^{-0.020} / _{-0.041}	32 +0.025									2815	2820	2825	2830	2840	
30	34	30 ^{-0.020} / _{-0.041}	34 +0.025								3012	3015	3020	3025	3030	3040	
32	36	32 ^{-0.025} / _{-0.050}	36 +0.025	1.970	2.005	1.2	0.4						3220		3230	3240	
35	39	35 ^{-0.025} / _{-0.050}	39 +0.025								3512	3515	3520	3525	3530	3540	3550
38	42	38 ^{-0.025} / _{-0.050}	42 +0.025									3815			3830	3840	
40	44	40 ^{-0.025} / _{-0.050}	44 +0.025								4012		4020	4025	4030	4040	4050



FB090/FB092/FB09G 青铜卷制轴承标准公制尺寸

FB090/FB092/FB09G Bronze-Wrapped Bearings Standard Metric Size

单位Unit: mm


d	D	相配轴径 Shaft Dia. f ₇	座孔 Housing H7	壁厚 Wall Thickness		f ₁	f ₂	L ⁰ _{-0.40}										
				最小 Min.	最大 Max.			20	25	30	40	50	60	70	80	100	115	
45	50	45 ^{-0.025} _{-0.050}	50 ^{+0.025}					4520	4525	4530	4540	4550						
50	55	50 ^{-0.025} _{-0.050}	55 ^{+0.030}					5020		5030	5040	5050	5060					
55	60	55 ^{-0.030} _{-0.060}	60 ^{+0.030}							5530	5540	5550	5560					
60	65	60 ^{-0.030} _{-0.060}	65 ^{+0.030}	2.460	2.505	1.8	0.6			6030	6040	6050	6060	6070				
65	70	65 ^{-0.030} _{-0.060}	70 ^{+0.030}							6530	6540	6550	6560	6570				
70	75	70 ^{-0.030} _{-0.060}	75 ^{+0.030}								7040	7050	7060	7070	7080			
75	80	75 ^{-0.030}	80 ^{+0.030}							7530	7540	7550	7560	7570	7580			
80	85	80 ^{-0.035}	85 ^{+0.035}								8040	8050	8060	8070	8080	80100		
85	90	85 ^{-0.035}	90 ^{+0.035}								8540		8560		8580	85100		
90	95	90 ^{-0.035}	95 ^{+0.035}								9040	9050	9060		9080	90100		
95	100	95 ^{-0.035}	100 ^{+0.035}	2.440	2.490	1.8	0.6					9550	9560		9580	95100		
100	105	100 ^{-0.035}	105 ^{+0.035}									10050	10060		10080		100115	
105	110	105 ^{-0.035}	110 ^{+0.035}										10560		10580		105115	
110	115	110 ^{-0.035}	115 ^{+0.035}										11060		11080		110115	
120	125	120 ^{-0.035}	125 ^{+0.040}										12060		12080	120100		
125	130	125 ^{-0.040}	130 ^{+0.040}										12560			125100	125115	
130	135	130 ^{-0.040}	135 ^{+0.040}	2.415	2.465	1.8	0.6						13060		13080	130100		
140	145	140 ^{-0.040}	145 ^{+0.040}										14060		14080	140100		
150	155	150 ^{-0.040}	155 ^{+0.040}										15060		15080	150100		
160	165	160 ^{-0.040}	165 ^{+0.040}										16060		16080	160100	160115	
180	185	180 ^{-0.040}	185 ^{+0.046}	2.415	2.465	1.8	0.6								18080	180100		
190	195	190 ^{-0.046}	195 ^{+0.046}													19080	190100	
200	205	200 ^{-0.046}	205 ^{+0.046}													20080	200100	
220	225	220 ^{-0.046}	225 ^{+0.046}										20060		22080	220100		
250	255	250 ^{-0.046}	255 ^{+0.052}												25080	250100		
260	265	260 ^{-0.052}	265 ^{+0.052}	2.415	2.465	1.8	0.6								26080	260100		
280	285	280 ^{-0.052}	285 ^{+0.052}													28080	280100	
300	305	300 ^{-0.052}	305 ^{+0.052}															

注：要求相配轴孔H7，轴径f7，衬套压入座孔后内孔值为H8。

Note: Shaft hole is required to be H7. Shaft diameter is f7. After bearing is installed, the inner hole should be H8.

FB090/FB092 青铜卷制翻边轴承标准公制尺寸

FB090/FB092 Bronze-Wrapped Flange Bearing Standard Metric Size

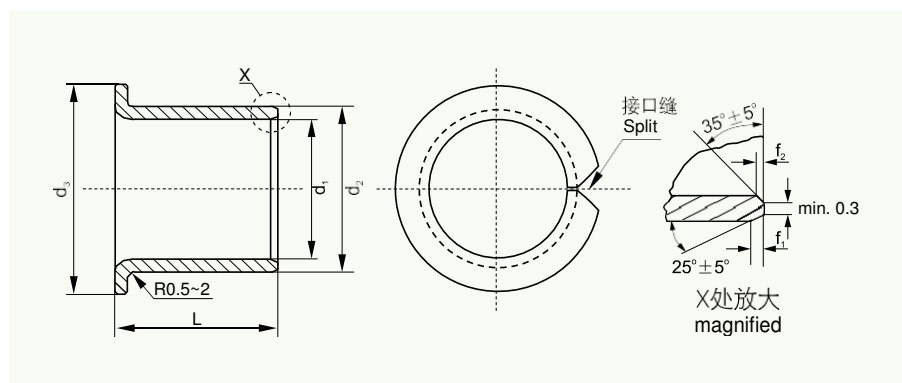

单位Unit: mm

d ₁	d ₂	d ₃	f ₁	f ₂	L ⁰ _{-0.40}										
					15	20	25	30	35	40	50	60	70	80	90
25	28	35	0.8	0.4	2515	2520	2525								
30	34	45				3020	3025	3030							
35	39	50	1.0	0.6		3520	3525	3530	3535						
40	44	55					4025	4030	4035	4040					
45	50	60						4530	4535	4540	4550				
50	55	65						5030	5035	5040	5050				
55	60	70						5530	5535	5540	5550				
60	65	75	1.2	0.8				6030	6035	6040	6050	6060			
65	70	80						6530	6535	6540	6550	6560			
70	75	85							7035	7040	7050	7060	7070		
75	80	90							7535	7540	7550	7560	7570		
80	85	100							8035	8040	8050	8060	8070	8080	
90	95	110									9050	9060	9070	9080	9090
100	105	120									10050	10060	10070	10080	10090
110	115	130									11050	11060	11070	11080	11090
120	125	140									12050	12060	12070	12080	12090
130	135	155										13060	13070	13080	13090
140	145	165										14060	14070	14080	14090
150	155	180										15060	15070	15080	15090
160	165	190										16060	16070	16080	16090
170	175	200	1.4	0.8								17060	17070	17080	17090
180	185	215										18060	18070	18080	18090
190	195	225										19060	19070	19080	19090
200	205	235										20060	20070	20080	20090
225	230	260										22560	22570	22580	22590
250	255	290										25060	25070	25080	25090
265	270	305										26560	26570	26580	26590
285	290	325										28560	28570	28580	28590
300	305	340										30060	30070	30080	30090

FB08G 固体润滑卷制轴承

FB08G Solid-Lubricant-Embedded Wrapped Bearings



材料结构 Material Structure

◎FB08G固体润滑轴承是以JF-800双金属材料为基体，再埋入特殊固体润滑剂制作成的新型滑动轴承。由于高强度承载的合金材料作基体，并经过严格选择的高分子填充材料为耐磨剂，合理的螺旋角度菱形块状均布的润滑面，润滑面积达25%，因此，能发挥超群的低摩擦，良好的润滑性和抗磨损性免除加油。该产品已广泛应用于起重起、微型电机、升降机、吊车及冶金机械等行业。

◎FB08G is a kind of steel-lead bronze alloys based bearing, which is embedded with particular formulation of solid lubricants. Owing to the high strength, high load capacity and the spirally distributed diamond type of the embedded solid lubricant, the high temperature


resistant action as extraordinary exploited. The lubrication area of the bearing surface is being about 25%. This type of bearing is particularly applied in starting motor for automobiles, generators cranes and those machines in metallurgical industry.

技术参数 Tech.Data

最大承载压力	Load capacity	150N/mm ²
适应温度范围	Temperature limit	-100℃~+200℃
最高滑动速度	Speed limit	1.5M/s
摩擦系数	Friction clef	0.06~0.25
允许最高PV值(干)	PV limit (dry)	2.5N/mm ² ·m/s
允许最高PV值(油)	PV limit (oil)	15N/mm ² ·m/s

FB08G 固体润滑卷制轴承标准公制尺寸

FB08G Solid-Lubricant-Embedded Wrapped Bearings Standard Metric Size

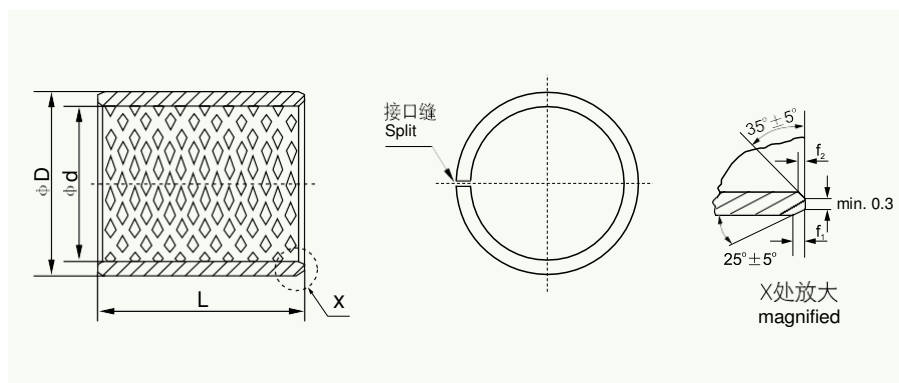

单位 Unit: mm

d	D	f ₁	f ₂	L ⁰ _{-0.40}													
				10	15	20	25	30	35	40	50	60	70	80	90	100	
10	12	0.3	0.5	1010	1015	1020											
12	14			1210	1215	1220											
14	16			1410	1415	1420	1425										
15	17			1510	1515	1520	1525										
16	18			1610	1615	1620	1625										
18	20			1810	1815	1820	1825										
20	23	0.8	0.4	2210	2015	2020	2025										
22	25			2010	2215	2220	2225	2230									
24	27				2415	2420	2425	2430									
25	28				2515	2520	2525	2530									
28	32	1.0	0.6		2815	2820	2825	2830									
30	34				3015	3020	3025	3030	3035	3040							
32	36				3215	3220	3225	3230	3235	3240							
35	39				3515	3520	3525	3530	3535	3540							
40	44					4020	4025	4030	4035	4040	4050						
45	50	1.2				4520	4525	4530	4535	4540	4550						
50	55					5020	5025	5030	5035	5040	5050	5060					
55	60					5520	5525	5530	5535	5540	5550	5560					
60	65							6025	6030	6035	6040	6050	6060	6070			
65	70								6530	6535	6540	6560	6560	6570			
70	75	1.4						7030	7035	7040	7050	7060	7070	7080			
75	80							7530	7535	7540	7550	7560	7570	7580			
80	85							8030	8035	8040	8050	8060	8070	8080			
85	90										7550	8560	8570	8580	9590		
90	95										9050	9060	9070	9080	9090		
95	100	0.8									9550	9560	9570	9580	9590	951000	
100	105										10050	10060	10070	10080	10090	100100	
105	110										10550	10560	10570	10580	10590	105100	
110	115										11050	11060	11070	11080	11090	110100	
115	120										11550	11560	11570	11580	11590	115100	
120	125	1.4										12060	12070	12080	12090	120100	
125	130											12560	12570	12580	12590	125100	
130	135											13060	13070	13080	13090	130100	
135	140											13560	13570	13580	13590	135100	
140	145											14060	14070	14080	14090	140100	
145	150											14560	14570	14580	14590	145100	
150	155											15060	15070	15080	15090	150100	
155	160											15560	15570	15580	15590	155100	
160	165											16060	16070	16080	16090	160100	

JDB 固体镶嵌轴承 JDB Solid-lubricant-Inlaid Bearings



材料结构 Material Structure

铜合金镶嵌式固体润滑剂自润滑轴承，结合了铜合金的耐磨性及固体润滑剂的自润滑性能，使其在使用过程中无需加油维护。产品被广泛应用于高载、间歇性或摇摆运动，如汽机车生产流水线、水轮机、水库工作/事故门、塑胶机械、冲床周边设备等。根据使用的工况，可以提供各种类型的铜合金。


This material provides a maintenance-free bearing solution, particularly for high load, intermittent of oscillating motion. Solid lubricants within a bronze combines the strength of the bronze with the wear resistance and low friction. The application including automotive products line, water engineering, dam gate, plastic industries etc. Different bronze alloy type can be available according to the work condition.

技术参数 Tech.Data

最大承载	静承载 Static Load	250N/mm ²
Max. Load	动承载 Dynamic Load	100N/mm ²
最高线速度	干摩擦 Dry Friction	0.3m/s
Max linear speed	油摩擦 Oil Friction	1.0m/s
最大PV值 PV limit		1.65N/mm ² ·m/s
抗拉强度 Tensile strength		750N/mm ²

使用温度 Working temperature	-100℃~+300℃
摩擦系数 Abrasion coefficient	0.03~0.20
导热系数 Heat conducting coefficient	60W/(m·K) ⁻¹
热膨胀系数 Heat expansion coefficient	19·10 ⁻⁶ K ⁻¹
延伸率 Extensile rate	12%
硬度 Hardness	HB < 210

JDB 直固体镶嵌轴承标准公制尺寸 JDB Solid-lubricant-Inlaid Bearings Standard Metric Size

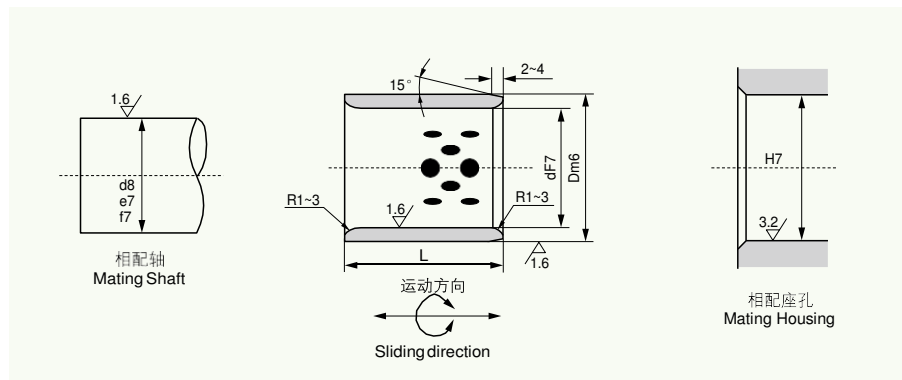

单位Unit: mm

d	D	内径 I.D. F7		外径 O.D. m6		L $\begin{smallmatrix} -0.10 \\ -0.30 \end{smallmatrix}$													
						8	10	12	15	16	20	25	30	35	40	50	60	70	80
8	12	8	$\begin{smallmatrix} +0.028 \\ +0.013 \end{smallmatrix}$	12	$\begin{smallmatrix} +0.018 \\ +0.007 \end{smallmatrix}$	081208	081210	081212	081215										
10	14	10		14		101408	101410	101412	101415		101420								
12	18	12		18			121810	121812	121815	121816	121820	121825	121830						
13	19	13		19			131910		131915	131916									
14	20	14	$\begin{smallmatrix} +0.034 \\ +0.016 \end{smallmatrix}$	20			142010	142012	142015		142020	142025	142030						
15	21	15		21			152110	152112	152115	152116	152120	152125	152130						
16	22	16		22	$\begin{smallmatrix} +0.021 \\ +0.008 \end{smallmatrix}$		162210	162212	162215	162216	162220	162225	162230	162235	162240				
18	24	18		24				182412	182415	182416	182420	182425	182430	182435	182440				
20	28	20		28			202810	202812	202815	202816	202820	202825	202830	202835	202840	202850			
22	32	22		32				223212	223215		223220	223225							
25	33	25		33				253312	253315	253316	253320	253325	253330	253335	253340	253350	253360		
30	38	30	$\begin{smallmatrix} +0.041 \\ +0.020 \end{smallmatrix}$	38				303812	303815		303820	303825	303830	303835	303840	303850	303860		
35	45	35		45	$\begin{smallmatrix} +0.025 \\ +0.009 \end{smallmatrix}$						354520	354525	354530	354535	354540	354550	354560		
40	50	40		50							405020	405025	405030	405035	405040	405050	405060	405070	405080
45	55	45		55									455530	455535	455540	455550	455560		
50	60	50		60									506030	506035	506040	506050	506060	506070	506080



JDB 直固体镶嵌轴承标准公制尺寸


JDB Solid-lubricant-Inlaid Bearings Standard Metric Size

单位Unit: mm

d	D	内径 I.D. F7		外径 O.D. m6		L ^{-0.10 -0.30}												
						30	35	40	50	60	70	80	100	120	130	140	150	
50	62	50	+0.050 +0.025	62		506230	506235	506240	506250	506260	506270							
50	65	50		65		506530		506540	506550	506560	506570	506580	5065100					
55	70	55		70				557040	557050	557060	557070							
60	75	60		75	+0.030 +0.011	607430	607435	607440	607540	607460	607470	607480						
60	75	60		75		607530	607535	607540	607550	607560	607570	607580	6075100					
63	75	63		75						637560	637570	637580						
65	80	65		80					658050	658060	658070	658080						
70	85	70	+0.060 +0.030	85			708535	708540	708550	708560	708570	708580	7085100					
70	90	70		90					709050	709060	709070	709080						
75	90	75		90						759060	759070	759080	7590100					
75	95	75		95	+0.035 +0.013					759560	759570	759580	7595100					
80	96	80		96				809640	809560	809660	809670	809680	8096100	8096120				
80	100	80		100				8010040	8010050	8010060	8010070	8010080	80100100	80100120		80100140		
90	110	90		110		9011030			9011050	9011060	9011070	9011080	90110100	90110120				
100	120	100	+0.071 +0.036	120						10012060	10012070	10012080	100120100	100120120		100120140		
110	130	110		130									11013080	110130100	110130120			
120	140	120		140									12014080	120140100	120140120		120140140	
125	145	125		145									125145100	125145120				
130	150	130		150	+0.040 +0.015								130150100		130150130			
140	160	140	+0.083 +0.043	160									140160100			140160140		
150	170	150		170									150170100				150170150	
160	180	160		180									160180100				160180150	

JFB 翻边轴承标准公制尺寸


JFB Flange Bearings Standard Metric Size

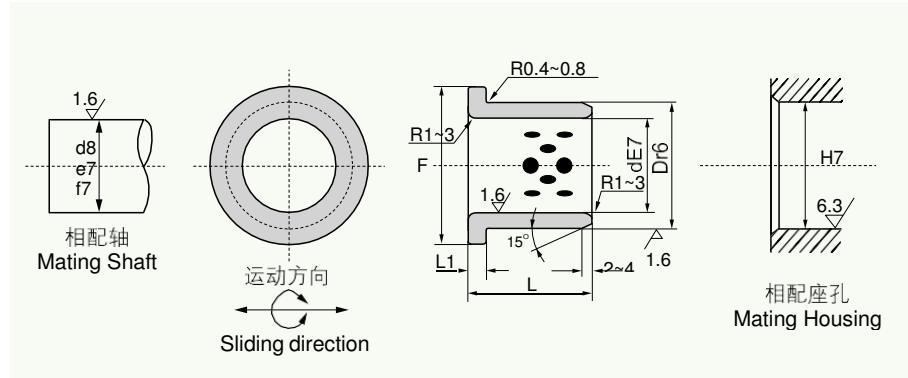

单位Unit: mm

d	D	内径 I.D. F7		外径 O.D. m6		F	L ₁	L ^{-0.10 -0.30}									
								15	20	25	30	35	40	50	60	80	100
10	14	10	^{+0.040} _{+0.025}	14	^{+0.034} _{+0.023}	22	2	1015	1020								
12	18	12		18		25		1215	1220								
13	19	13		19		26		1315	1320								
14	20	14	^{+0.050} _{+0.032}	20		27	3	1415	1420								
15	21	15		21	^{+0.041} _{+0.028}	28		1515	1520	1525	1530						
16	22	16		22		29		1615	1620	1625	1630						
20	30	20		30		40			2020	2025	2030	2035					
25	35	25	^{+0.061} _{+0.040}	35		45			2520	2525	2530	2535					
30	40	30		40	^{+0.050} _{+0.034}	50			3020	3025	3030	3035	3040	3050			
35	45	35		45		60	5			3525	3530	3535	3540	3550			
40	50	40		50		65					4030	4035	4040	4050			
45	55	45	^{+0.075} _{+0.050}	55		70					4530	4535	4540	4550	4560		
50	60	50		60	^{+0.060} _{+0.041}	75							5050	5050	5060		
55	65	55		65		80							5540	5550	5560		
60	75	60		75	^{+0.062} _{+0.043}	90							6040	6050	6060	6080	
70	85	70	^{+0.090} _{+0.060}	85		105	7.5							7050	7060	7080	
75	90	75		90	^{+0.073} _{+0.051}	110								7550	7560		
80	100	80		100		120									8060	8080	80100
100	120	100		120	^{+0.076} _{+0.054}	150	10								10060	10080	100100
120	140	120	^{+0.107} _{+0.072}	140	^{+0.088} _{+0.063}	170									12060	12080	120100


JSP 滑块标准公制尺寸 JSP Sliding Plate Standard Metric Size

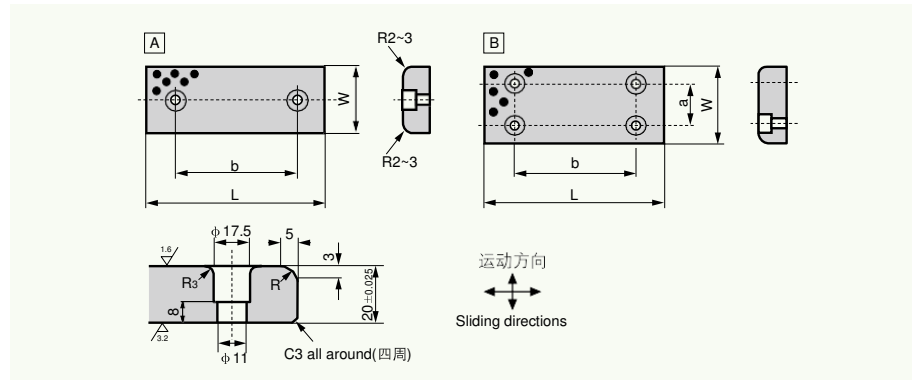

单位Unit: mm

型号规格 Designation	W	L	a	b	Sketch 图示
JSP 28 × 75	28	75	-	45	A
JSP 28 × 100		100		50	
JSP 28 × 150		150		100	
JSP 38 × 75	38	75	-	45	A
JSP 38 × 100		100		50	
JSP 38 × 150		150		100	
JSP 48 × 75	48	75	-	45	A
JSP 48 × 100		100		50	
JSP 48 × 125		125		75	
JSP 48 × 150	58	150	-	100	A
JSP 48 × 200		200		150	
JSP 58 × 75		75		45	
JSP 58 × 100	58	100	-	50	A
JSP 58 × 150		150		100	
JSP 75 × 75	75	75	-	25	A
JSP 75 × 100		100		50	
JSP 75 × 125		125		75	
JSP 75 × 150	100	150	50	100	A
JSP 75 × 200		200		150	
JSP 100 × 100		100		50	
JSP 100 × 125	100	125	50	75	A
JSP 100 × 150		150		100	
JSP 100 × 200		200		150	
JSP 100 × 250	125	250	50	200	B
JSP 100 × 300		300		200	
JSP 125 × 125		125		75	
JSP 125 × 150	125	150	50	100	B
JSP 125 × 200		200		150	
JSP 125 × 250		250		200	
JSP 125 × 300	150	300	100	200	B
JSP 125 × 350		350		200	
JSP 150 × 150		150		100	
JSP 150 × 200	150	200	100	150	B
JSP 150 × 250		250		200	

JTW 止推垫片标准公制尺寸 JTW Thrust Washer Standard Metric Size

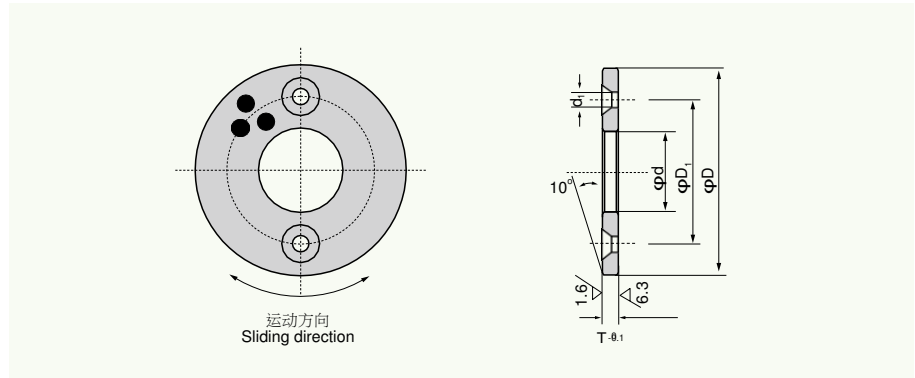

单位Unit: mm

型号规格 Designation	ϕd	ϕD	$T_{-0.10}^0$	螺孔 Bolt Hole			
				ϕD_1	平头螺钉 Crop Bolt	ϕd_1	孔数 Bore Number
JTW 10	10.2	30		20			
JTW 12	12.2						
JTW 13	13.2	40		28			
JTW 14	14.2		3		M3	3.5	
JTW 15	15.2						
JTW 16	16.2	50		35			
JTW 18	18.2						2
JTW 20	20.2						
JTW 25	25.2	55	5	40	M5	6	
JTW 30	30.2	60		45			
JTW 35	35.2	70		50			
JTW 40	40.2	80	7	60			
JTW 45	45.3	90		70	M6	7	
JTW 50	50.3	100		75			
JTW 55	55.3	110	8	85			
JTW 60	60.3	120		90			
JTW 70	70.3	130		100			
JTW 75	75.3	140		110	M8	9	4
JTW 80	80.3	150	10	120			
JTW 90	90.5	170		140			
JTW 100	100.5	190		160	M10	11	
JTW 120	120.5	200		175			

FZ 直线轴承 FZ Ball Retainer Bearings



产品简介 Intruduction

◎FZH (铜基)、FZL (铝基)、FZP (树脂基) 钢球保持圈, 分别以铜合金、硬铝合 金、POM 树脂为基体, 并在其外圆表面上, 加工出排列有序、大小适当, 形状特殊的孔 穴, 在其孔穴中镶入滚动轴承钢球。口采用最新的沟槽圆周锁球工艺, 有效地解决了传统 式锁球和压痕式锁球不能完全防止钢球脱落的难题。孔底加工出 90° 止口使钢球在孔内自 由转动而不脱落。由于钢球的直径大于保持圈的壁厚, 所以在使用时钢球高出保持圈内、 外圆表面, 直接与相配的孔与轴接触, 使基体(保持圈)浮于中间, 并且相配的孔与轴半径 之差小于钢球直径, 即钢球与之配合为过盈配合, 配合精度高, 轴与孔相对运动灵活。是 保持圈的更新换代产品。

◎FZH. FZL. FZP. ball retainer are as copper, aluminium, POM base. they are machined some regular holes and embedded the steel-ball into. The new work-craft will prevent the ball getting out of as old. as the ball diameter is larger than the retainer s thickness, so it will face to face directly with 90° guide bushing, that will bring high precision match now the ball retainer series items are designed to rotate on the post, as well as maintainits vertical motion. we believe this will give you the benefit of increasing accijracy.

优点与用途 Advantage And Use

◎传统的具有相对运动的孔与轴是有一定间隙的, 并孔与轴之间运动磨擦系数较大, 使用钢球保持圈后, 使轴与孔不直接接触, 而是通过中间微量过盈的钢球, 因而运动精度高, 滚动摩擦代替动摩擦, 滚动灵活, 摩擦系数小, 使用寿命长, 在既有转动、又有移动的场合, 用无油或加油的轴套与轴相配合, 虽然能满足, 但运动精度较低, 用滚动轴承, 只能满足轴相对转动的场合, 而钢球保持圈, 则上述二个条件均得到满足, 目前已广泛应用于冷冲模滚动模架、高精度机床、机床附件以及要求高精度轴向或轴径向同时运动场合。

◎As the traditional work-craft has some grudge between bushing with posts, and the coefficient of friction is larger. now we have changed the work-ways to steel-ball directly face to face guide bushing, so the precision is improved. it composes of both active roll and lower friction coefficient, now they have been widely used in punching machine, die machine, high precision machine which need rotation and vertical motion.


相配零件的要求 Installed Spares Requested

1. 导套: 材料 GCr15、YB9, 热处理, 硬度 HRC62~66, 技术条件按 GB/T12446 与轴配合应具有 0.01-0.02 径向过盈量, 表面粗糙度为^{0.05} 2. 轴: 材料 GCr15、YB9, 热处理, 硬度 HRC62~66, 技术条件按 GB/T12446, 轴的公差采用 h5, 表面粗糙度为^{0.05} 3. 测量: 用通用的测量手段 (气动量仪、外径千分尺、内径千分表等) 测量轴套和钢球 的尺寸偏差值, 即可求出配合后的过盈量, 即 $Y_{max}=d_{max}+2d'-D_{min}$, 要求过盈量为 0.01-0.02mm


1. GUIDE BUSHING: MATERIAL GCr15, YB9, HEAT TREATMENT HRC62-66, TECHNIQUE CONDITION ACCORDING TO GB/T1 2446. REQUEST 0.01-0.02mm THE SURFACE ROUGHNESS IS^{0.05}

2. GUIDIE POSTS: MATRIAL GCr15, YB9, HEAT TREATMENT HRC62-66, THE TOLERANCE OF SHAFT IS h5, THE SURFACE ROUGHNESS IS^{0.05}

3. SIZE TEST: IT IS TESTED BY OUTSIDE MICROMETER & DIAL GAUGE AS USUAL. THE Y_{max} ($Y_{max}+2d'-D_{min}$) REQUEST 0.01-0.02mm

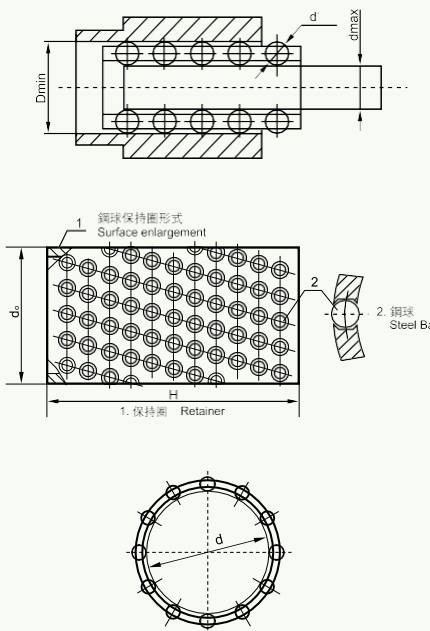

FZ 钢球保持圈标准公制尺寸 FZ Ball Retainers Standard Metric Size

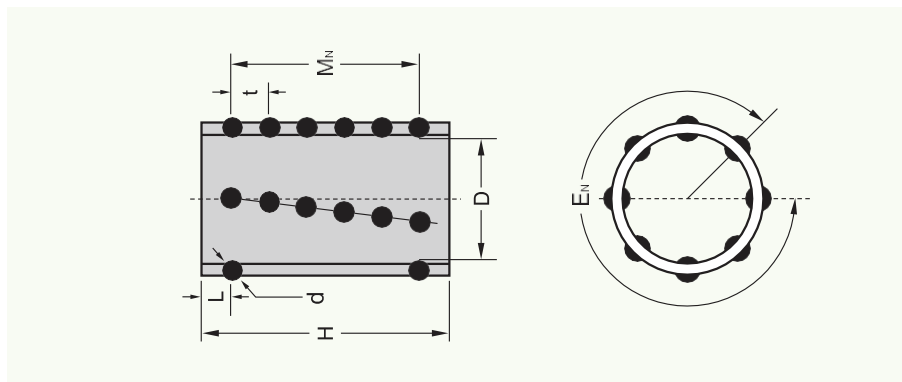

单位unit:mm

型号规格 Designation	D	H	d	E_N	M_N	球 BALLS	t	L
FZ(*)1950	19	50		12	8	96		5.75
FZ(*)1960		60			10	120		5.25
FZ(*)2050	20	50		12	8	96		5.75
FZ(*)2060		60			10	120		5.25
FZ(*) 2250	22	50		14	8	112	5.5	5.75
FZ(*) 2260		60			10	140		5.25
FZ(*)2360	23	60	3	14	10	208		5.25
FZ(*)2475	24	75			13	128		4.50
FZ(*)2550	25	50		16	8	112		5.75
FZ(*)2560		60			10	160		5.25
FZ(*)2575		75			13	208		4.50
FZ(*)2775	27	75			13	208		4.50
FZ(*)2860	28	60		14	8	112		7.25
FZ(*)2875		75			11	154		5.00
FZ(*)3060	30	60	4	14	8	112	6.5	7.25
FZ(*)3075		75			11	154		5.00
FZ(*)3260	32	60		16	8	128		7.25
FZ(*)3275		75			11	192		5.00
FZ(*)3390		90			13	208		6.00
FZ(*)3685	36	85		16	12	192		6.75
FZ(*)3690		90			13	208		6.00
FZ(*)3870	38	70		16	8	128		7.00
FZ(*)3890		90			11	176		5.00
FZ(*)4090	40	90			11	176		5.00
FZ(*)4590	45	90	5	18	11	198	8.0	5.00
FZ(*)45110		110			13	234		7.00
FZ(*)5090	50	90		20	11	220		5.00
FZ(*)50110		110			13	260		7.00
FZ(*)6090	60	90		22	11	242		5.00
FZ(*)60110		110			13	286		7.00
FZ(*)80130	80	130		28	15	420		9.00

注：FZ(*)为：FZH(铜基)、FZL(铝基)、FZP(树脂基)

Notes: FZ(*)： FZH (Bronze based) FZL (Aluminum based) FZP (Resin based)

FD 四氟软带 **FD PTFE Soft Strips**



材料结构 Material Structure

◎FD以PTFE为主材，以铜粉及其它高分子添加剂为辅的耐磨性材料。产品广泛运用化工行业、油压、油缸、汽摩减振器、机床导轨、印刷机械、纺织机械等轻载但需要自润滑的场合。产品如经过特殊处理，可粘帖于钢质或者橡胶面上，产品在使用过程中无爬行现象。

◎FD consist of PTFE with bronze powder and additive material, This material structure enables the final goods have more light and easy for install. It is widely been used in chemica lindustries, medicalindustries, fluid hydraulic industries, textile machines, OA machines, Door/window hinges etc.

技术参数 Tech.Data

最大承载	静承载 Static Load	30N/mm ²
Max. Load	动承载 Dynamic Load	20N/mm ²
使用温度 Temp. Limit		-40℃~+250℃
最高滑动速度	干摩擦 Dry Friction	0.5m/s
Tiptop Sliding Velocity	油摩擦 Oil Friction	2m/s
摩擦系数 Friction Coeff.		0.10-0.20
允许最高PV值 PV limit	干摩擦 Dry Friction	1.65N/mm ² ·m/s


FD 产品活塞环尺寸 Size of The Products

20×18×2	25×23.2×8	30×38.2×8
20×18×3	25×23×8	30×28×8
5×22.2×2.5	27×25×8	30×38.2×11.4
25×22×2.5	30×28×9	32×30.2×8

FD 产品带材尺寸 **Strip Measurement of The Products**

100×1.5	100×1	200×0.5
8×2.5	12×2.5	25×2.5
6.1×2.5	7.9×2.5	14.8×2.5
19.5×2.5	24.5×2.5	29.5×2.5

SF-1X 无油润滑材料

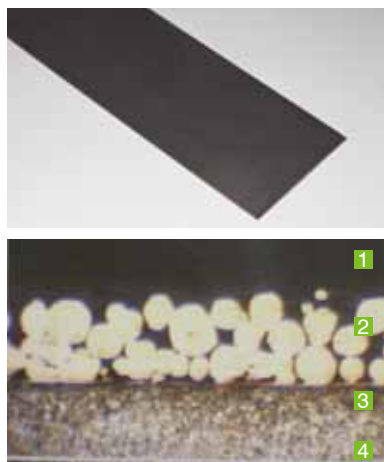


材料组织结构:

- | | |
|-----------------------------------|-------------------------------------|
| 1、聚四氟乙烯与铅的混合物 0.01~0.03mm | ■ 摩擦系数: 0.04~0.20 |
| 2、球形青铜粉: 0.2~0.3mm | ■ 导热系数: 13W/MK |
| 3、钢背: 0.5~3.03mm | ■ 使用温度范围: -195℃~270℃ |
| 4、电镀层: 镀锡层厚 0.005mm 或镀铜层厚 0.008mm | ■ 线膨胀系数: $11 \times 10^{-6} K^{-1}$ |

应用特点:

- 1、无油润滑或少油润滑场合, 耐磨性能好, 摩擦系数小, 使用寿命长。
- 2、有适量的弹塑性, 能将应力分布在较宽的接触面上。
- 3、静动摩擦系数相近, 能消除低速下的爬行。
- 4、对于对磨轴的硬度要求低, 未经调质处理的轴都可使用, 在运转构成中能形成转移膜, 起到保护对磨轴的作用, 无咬轴现象。
- 5、钢背可电镀多种金属, 可在腐蚀介质中使用, 目前已广泛应用于各种机械的滑动部位, 例如: 印刷机、纺织机、烟草机械、微电机、汽车、摩托车与农林机械等等。

SF-1T 齿轮石泵专用材料

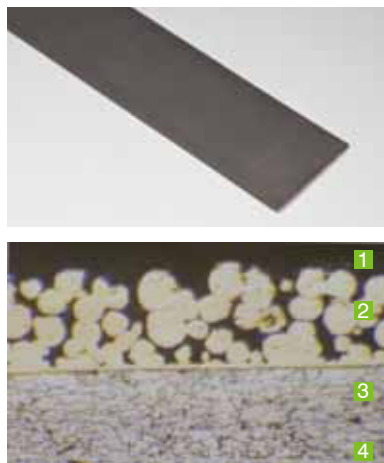


材料组织结构:

- | | |
|-----------------------------------|-------------------------------------|
| 1、聚四氟乙烯与铅及其他填充混合物 0.01~0.03mm | ■ 摩擦系数: 0.03~0.18 |
| 2、球形青铜粉: 0.2~0.3mm | ■ 导热系数: 13W/MK |
| 3、钢背: 0.5~3.3mm | ■ 使用温度范围: -195℃~260℃ |
| 4、电镀层: 镀锡层厚 0.005mm 或镀铜层厚 0.008mm | ■ 线膨胀系数: $11 \times 10^{-6} K^{-1}$ |

应用特点:

- 1、在有油润滑条件下摩擦系数小而稳定。
- 2、耐磨性能好, 抗冲击性能好。
- 3、由此材料制作的衬套, 在流体润滑条件下 PV 值可达到 120N/mm²*m/s
- 4、目前已广泛运用于各种齿轮油泵、柱塞泵、叶片泵等场合, 对流体润滑或境界润滑条件下的中高压齿轮泵尤其使用。

SF-1P 往复运动材料

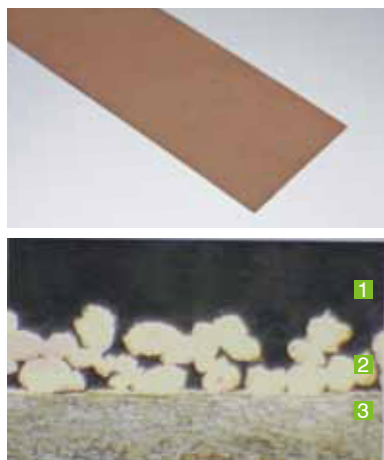


材料组织结构:

- | | |
|-----------------------------------|-------------------------------------|
| 1、聚四氟乙烯与铜混合物 0.02~0.04mm | ■ 摩擦系数: 0.04~0.20 |
| 2、球形青铜粉: 0.2~0.3mm | ■ 导热系数: 13W/MK |
| 3、钢背: 0.5~3.3mm | ■ 使用温度范围: -195℃~270℃ |
| 4、电镀层: 镀锡层厚 0.005mm 或镀铜层厚 0.008mm | ■ 线膨胀系数: $11 \times 10^{-6} K^{-1}$ |

应用特点:

- 1、具有在沾油情况下润滑能力强、耐磨性能好、保护油膜清晰的特点。
- 2、能较好的保护对轴表面不受磨损, 对往复运动场合较能适用。
- 3、应其含铅量很少, 故迎合了环保要求。
- 4、适用于摩托车减震器、各种液压油缸、液压马达、气动元件等领域。

SF-1W 无铅材料

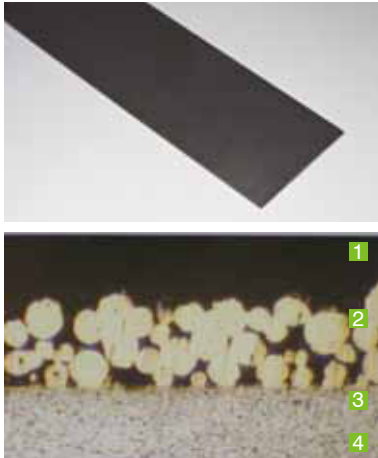


材料组织结构:

- | | |
|-----------------------------------|--|
| 1、聚四氟乙烯与纤维混合物 0.01~0.03mm | ■ 摩擦系数: 0.04~0.20 |
| 2、球形青铜粉: 0.2~0.3mm | ■ 导热系数: 13W/MK |
| 3、钢背: 0.5~3.3mm | ■ 使用温度范围: -195℃ ~270℃ |
| 4、电镀层: 镀锡层厚 0.005mm 或镀铜层厚 0.008mm | ■ 线膨胀系数: $11 \times 10^{-6} \text{K}^{-1}$ |

应用特点:

- 1、PTFE、纤维的混合物在运动时可形成很好的转移膜保护对磨轴。
- 2、因其不含铅, 故对于人体无害。铜和钢板具有良好的导热性能, 表面的电镀层具有较好的耐腐蚀性。
- 3、已广泛运用于食品机械、医疗机械、烟草机械、饮料机械及其他绿色机械上。随着国际环保的逐步发展, SF-1W 将是 SF-1 产品的替代品。

SF-1B 青铜基材料

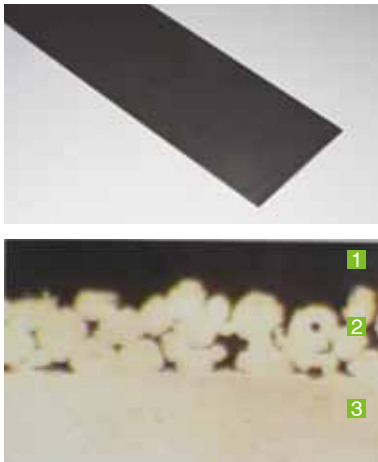


材料组织结构:

- | | |
|---------------------------|--|
| 1、聚四氟乙烯与铅的混合物 0.01~0.03mm | ■ 摩擦系数: 0.04~0.18 |
| 2、球形青铜粉: 0.2~0.3mm | ■ 导热系数: 18W/MK |
| 3、钢背: 0.5~3.3mm | ■ 使用温度范围: -195℃ ~300℃ |
| | ■ 线膨胀系数: $21 \times 10^{-6} \text{K}^{-1}$ |

应用特点:

- 1、PTFE、铅的混合物在运动时可形成很好的转移膜保护对磨轴。
- 2、烧结层和铜基板具有良好的导热性, 可迅速转移运作过程中产生的热量。
- 3、铜具有自润滑性能, 可运用于长期运作而无法停机检修的部位。
- 4、基体铜具有良好的抗腐蚀能力, 可运用于弱酸、强碱场合。
- 5、已广泛运用于冶金钢铁工业、高温炉钢环部位、水泥灌浆泵、螺旋式输送机、港口机械及船舶机械上等。
- 6、可在外部组合钢套, 或制成翻边, 达到内孔、端面同时使用的效果。

SF-1D 液压专用材料

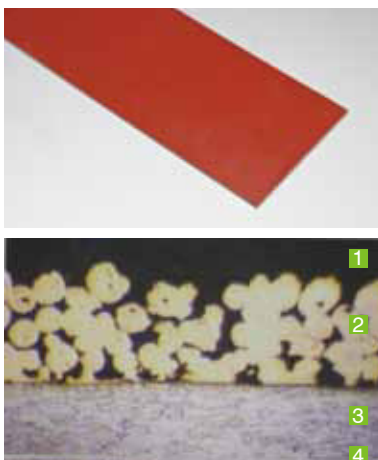


材料组织结构:

- | | |
|-----------------------------------|--|
| 1、聚四氟乙烯与亲油性纤维混合物 0.01~0.03mm | ■ 摩擦系数: 0.04~0.18 |
| 2、球形青铜粉: 0.2~0.3mm | ■ 导热系数: 16W/MK |
| 3、钢背: 0.5~3.3mm | ■ 使用温度范围: -195℃ ~270℃ |
| 4、电镀层: 镀锡层厚 0.005mm 或镀铜层厚 0.008mm | ■ 线膨胀系数: $15 \times 10^{-6} \text{K}^{-1}$ |

应用特点:

- 1、PTFE、亲油性纤维的混合物在运动时可形成很好的转移膜保护对磨轴。
- 2、抗冲击能力强, 耐磨性能好, 摩擦系数低, 走合性能好, 无咬轴现象。
- 3、可用于旋转、摇摆、往复运动之中。
- 4、由于不含铅, 故可用于食品机械、医疗机械等绿色环保设备。
- 5、除具有 SF-1P 的特点小, 特别适合于往复运动频繁、大侧向力的场合, 适用于液压马达、汽车、摩托车减震器及各类液压油缸等领域。

SF-1S 不锈钢耐蚀材料

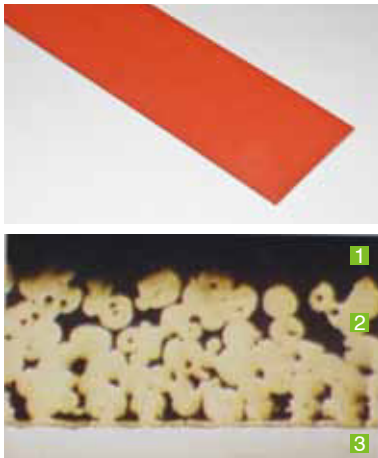

材料组织结构:


- 1、聚四氟乙烯与亲油性纤维混合物 0.01~0.03mm
- 2、球形青铜粉 :0.2~0.3mm
- 3、钢背: 0.5~3.3mm

- 摩擦系数: 0.04~0.20
- 导热系数: 16W/MK
- 使用温度范围: -195℃ ~270℃
- 线膨胀系数: $15 \times 10^{-6} \text{K}^{-1}$

应用特点:

- 1、PTFE、亲油性纤维的混合物在运动时可形成很好的转移膜保护对磨轴。
- 2、耐磨性能好, 摩擦系数低, 走合性能好, 无咬轴现象。
- 3、可用于旋转、摇摆、往复运动之中。
- 4、耐腐蚀性能好。
- 5、由于不含铅, 故适用于食品饮料机械、医疗机械等绿色环保设备。
- 6、典型用途: 主要运用于中酸、强碱场合、例如: 化工中酸碱流量计、泵、阀、印染机械、海洋工业耐腐蚀滑动部位。

JF-800 双金属材料

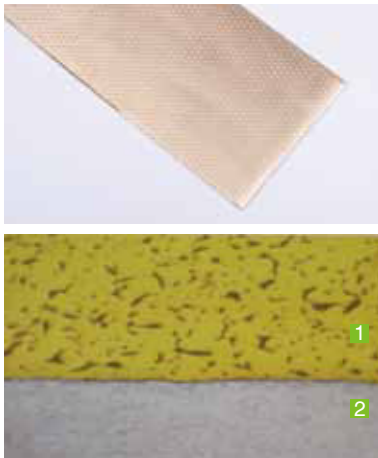

材料组织结构:


- 1、合金层: CuPb10Sn10
- 2、钢背: 0.6~5mm

- 合金层材质: CuPb10Sn10
- 摩擦系数: ≤ 0.12
- 最高使用温度: 260℃
- 合金层硬度: (60~90) HB

应用特点:

- 1、双金属合金材料中承载能力最强的一种。
- 2、适用于低速高载场合。
- 3、可在摩擦面加工各种油槽、油穴及油孔, 满足不同工况条件的需要。
- 4、产品性能稳定, 已通过“蓝宝石实验”, 疲劳强度达 125MPa 以上。
- 5、广泛运用于重型车的平衡桥衬套、垫片; 推土机的重动轮、支动轮、汽车钢板衬套等。

JF-850 双金属材料

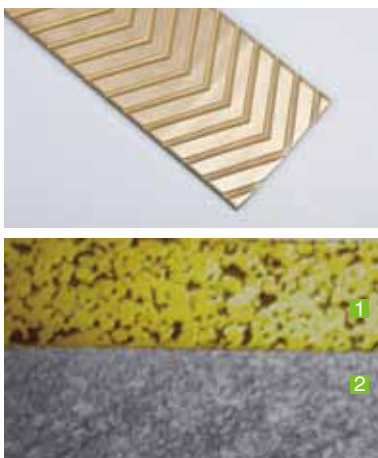

材料组织结构:

- 1、合金层: CuSn6Zn6Pb3
- 2、钢背: 0.6~5mm

- 合金层材质: CuSn6Zn6Pb3
- 摩擦系数: ≤ 0.13
- 最高使用温度: 170℃
- 合金层硬度: (40~80) HB

应用特点:

- 1、双金属合金材料中承载能力较强的一种。
- 2、适用于低速高载场合。
- 3、可在摩擦面加工各种油槽、油穴及油孔。
- 4、广泛运用于汽车发动机、底盘、摩托车离合器、齿轮摩擦板和起重设备领域。

JF-930 双金属材料



材料组织结构:

- 1、合金层: CuSn6.5P0.1
- 2、钢背: 0.6~5mm

- 合金层材质: CuSn6.5P0.1
- 摩擦系数: ≤ 0.13
- 最高使用温度: 260℃
- 合金层硬度: (60~90) HB

应用特点:

- 1、结合强度高, 承载能力大, 耐磨性能好。
- 2、适用于低速高载场合。
- 3、可在摩擦面加工各种油槽、油穴及油孔。
- 4、具有无铅特点, 可以是其他有铅产品的替代产品。
- 5、广泛运用于矿山机械、汽机车、建筑机械、农用机械、轧钢机械等。



SF-2X 边界润滑材料



材料组织结构:

- 1、聚四氟乙烯与铅混合物 0.3~0.5mm
- 2、球形青铜粉: 0.2~0.3mm
- 3、钢背: 0.4~2.7mm
- 4、电镀层: 镀铜层 0.008mm

- 摩擦系数: 0.05~0.25
- 导热系数: 13W/MK
- 使用温度范围: -40℃ ~130℃
- 线膨胀系数: 11*10-6K-1

应用特点:

- 1、承载好, 耐磨性能好。
- 2、适用于高载低速下的旋转运动, 摇摆运动及经常在载荷下启闭频繁而不易形成流体动力润滑的场合。
- 3、表面的塑料层在加工成型时可留一定的余量, 装配压入座孔后可自行加工, 以达到更好的装配尺寸。
- 4、主要运用于汽车底盘、冶金机械、矿山机械、水利机械、建筑机械、农用机械、轧钢设备等。



SF-2Y 边界润滑材料



材料组织结构:

- 1、缩醛树脂与亲油性纤维混合物 0.3~0.5mm
- 2、球形青铜粉: 0.2~0.3mm
- 3、钢背: 0.4~2.7mm
- 4、电镀层: 镀锡层厚 0.005mm 或镀铜层厚 0.008mm

- 摩擦系数: 0.05~0.25
- 导热系数: 13W/MK
- 使用温度范围: -40℃ ~130℃
- 线膨胀系数: 11*10-6K-1

应用特点:

- 1、承载好, 耐磨性能好。
- 2、适用于高载低速下的旋转运动, 摇摆运动及经常在载荷下启闭频繁而不易形成流体动力润滑的场合。
- 3、表面的塑料层在加工成型时可留一定的余量, 装配压入座孔后可自行加工, 以达到更好的装配尺寸。
- 4、主要运用于进口纺织设备、柱塞泵摆动部位、汽车操纵杆部位等。
- 5、因其不含铅, 故可广泛运用于无铅领域。



SF-2S 边界润滑材料



材料组织结构:

- | | |
|-----------------------------------|----------------------|
| 1、缩醛树脂与亲油性纤维混合物 0.3~0.5mm | ■ 摩擦系数: 0.05~0.20 |
| 2、球形青铜粉: 0.2~0.3mm | ■ 导热系数: 13W/MK |
| 3、钢背: 0.4~2.7mm | ■ 使用温度范围: -40℃ ~130℃ |
| 4、电镀层: 镀锡层厚 0.005mm 或镀铜层厚 0.008mm | ■ 线膨胀系数: 11*10-6K-1 |

应用特点:

- 1、承载好, 耐磨性能好。
- 2、适用于干摩擦和少油润滑的场合。
- 3、目前产品已应用在摇摆运动、易磨损、易腐蚀的场合, 如卷扬机、推土机、印染机、采煤机及吊车、行车高空作业机等场合。



FB090 无油润滑材料



FB090 无油润滑材料是采用高密度铜合金带材为基体, 表面轧制菱形或半球形油穴。具有密度高、承载能力大、耐磨性能好、使用寿命长等优点, 该材料已广泛应用于起重机械、建筑机械、汽车拖拉机底盘、机床工业及采矿机械中, 还可以制成轴瓦、翻边轴套、止推垫片和球碗等。

- 基体材质: CuSn8P0.3 或 CuSn6.5P0.1
- 硬度: HB110~140
- 使用温度范围: -80℃ ~200℃
- 摩擦系数: ≤ 0.15
- 磨损量: ≤ 0.008

FB092 无油润滑材料



FB092 无油润滑材料是以青铜材料为基体。具有耐磨性能好, 使用寿命长等优点, 该产品在卷制成轴承前, 应布置 $\phi 4\text{mm} \sim \phi 6\text{mm}$ 的油孔, 面积达到 25%, 使油脂润滑充足。目前该产品已应用于输送机、升降机、卷扬机、校平机等中载、低速的场合。

- 基体材质: CuSn8P0.3 或 CuSn6.5P0.1
- 硬度: HB90~120
- 使用温度范围: -100℃ ~200℃
- 摩擦系数: ≤ 0.12
- 磨损量: ≤ 0.008

FB09G 青铜固体润滑材料



FB09G 青铜固体润滑材料是以青铜材料为基体，表面埋入固体润滑剂制作而成。由于此材料是以延伸率较高的铜合金材料为基体，所以可以制作特薄的卷制轴套，再加上理想的填充材料为耐磨剂，因此适用于汽车传动轴内作为耐磨的轴套使用，也可在无油润滑的场合使用。

- 基体材质: CuSn10P10+ 石墨
- 硬度: HB80~110
- 使用温度范围: -100℃ ~260℃
- 摩擦系数: ≤ 0.12
- 磨损量: ≤ 0.008

FB08G 固体润滑材料



FB08G 固体润滑材料是以 JF-800 双金属材料为基体，合金层埋入特殊固体润滑剂制作而成的新颖薄壁固体润滑材料。由于高强度承载的合金材料作基体，理想的填充材料为耐磨剂，合理的菱形块状润滑设计，使润滑面积达 25% 以上，因此，能发挥良好的润滑性和抗磨损性能。该材料主要应用于汽车变速齿轮箱、发电机、升降机、起重机械及冶金机械行业。

- 基体材质: CuSn10P10+ 石墨
- 硬度: HB60~90
- 使用温度范围: -100℃ ~260℃
- 摩擦系数: ≤ 0.15
- 磨损量: ≤ 0.01

FR 四氟软带材料



FR 四氟软带材料是以青铜丝网为基体，通过特殊烧结工艺，表面轧制聚四氟乙烯（PTFE）和其他填充减摩材料的混合物。它具有较低的摩擦系数，较好的耐磨特性。由于它的柔软性能好，所以可作为钢与钢对磨的隔离膜，实现无间隙、无噪音、无油润滑、无需保养、无污染的理想目的。目前该材料广泛用于纺织机械、关节轴承、汽车门铰链等场合。

- 使用温度范围: -40℃ ~280℃
- 摩擦系数: 0.05~0.20

SF-2S 边界润滑材料



材料组织结构:

- | | |
|-----------------------------------|----------------------|
| 1、缩醛树脂与亲油性纤维混合物 0.3~0.5mm | ■ 摩擦系数: 0.05~0.20 |
| 2、球形青铜粉: 0.2~0.3mm | ■ 导热系数: 13W/MK |
| 3、钢背: 0.4~2.7mm | ■ 使用温度范围: -40℃ ~130℃ |
| 4、电镀层: 镀锡层厚 0.005mm 或镀铜层厚 0.008mm | ■ 线膨胀系数: 11*10-6K-1 |

应用特点:

- 1、承载好, 耐磨性能好。
- 2、适用于干摩擦和少油润滑的场合。
- 3、目前产品已应用在摇摆运动、易磨损、易腐蚀的场合, 如卷扬机、推土机、印染机、采煤机及吊车、行车高空作业机等场合。



FB090 无油润滑材料



FB090 无油润滑材料是采用高密度铜合金带材为基体, 表面轧制菱形或半球形油穴。具有密度高、承载能力大、耐磨性能好、使用寿命长等优点, 该材料已广泛应用于起重机械、建筑机械、汽车拖拉机底盘、机床工业及采矿机械中, 还可以制成轴瓦、翻边轴套、止推垫片和球碗等。

- 基体材质: CuSn8P0.3 或 CuSn6.5P0.1
- 硬度: HB110~140
- 使用温度范围: -80℃ ~200℃
- 摩擦系数: ≤ 0.15
- 磨损量: ≤ 0.008

FB092 无油润滑材料



FB092 无油润滑材料是以青铜材料为基体。具有耐磨性能好, 使用寿命长等优点, 该产品在卷制成轴承前, 应布置 $\phi 4\text{mm} \sim \phi 6\text{mm}$ 的油孔, 面积达到 25%, 使油脂润滑充足。目前该产品已应用于输送机、升降机、卷扬机、校平等中载、低速的场合。

- 基体材质: CuSn8P0.3 或 CuSn6.5P0.1
- 硬度: HB90~120
- 使用温度范围: -100℃ ~200℃
- 摩擦系数: ≤ 0.12
- 磨损量: ≤ 0.008

轴承的选择与计算

轴承的选型 Bearing Selection

杰盛无油轴承根据不同的工况条件设计了不少的轴承材料。用户在使用和设计时应当根据轴承的使用温度、轴承的承载面压、线速度、耐磨性能要求、运动类型、安装情况、轴承成本等各方面因素综合考虑。

SF bush have developed kinds of bearing material according to difference work condition,the user can select the material base on bearing work environment, load, speed, wear, resistance request, moving method, installation, the cost of the material etc.

面压计算 Bearing Load

直套、翻边轴承 Cylindrical bushes, flange bushes

$$P = \frac{F}{dL} \quad (\text{N/mm}^2)$$


F = 轴承载值 Load (N)
d = 轴径 Shaft (mm)
L = 轴承长度 Bearing Length (mm)

止推垫片 Thrust Washer

$$P = \frac{4F}{(D^2 - d^2)\pi} \quad (\text{N/mm}^2)$$

F = 垫片承载值 Load (N)
d = 垫片外径 Washer OD (mm)
L = 垫片内径 Washer ID (mm)

由于受配合间隙、材料强度、轴承倒角、内部油槽等原因的影响，轴承的真正承载面压（ P_{act} ）会大于理论计算值（ P_{mean} ）。
As the factor of clearance, bushes chamfer, oil groove etc. The actually load (P_{act}) is higher than theory of calculation (P_{mean}).



线速度计算 Velocity

旋转运动 Rotating motion

$$V = \frac{dn\pi}{1000 \times 60} \quad (\text{m/s})$$

D = 轴径 Shaft (mm)
n = 转速/分 Rpm

摇摆运动 Oscillating motion

$$V = \frac{Dc\theta\pi}{1000 \times 360 \times 60} \quad (\text{m/s})$$

d = 轴径 Shaft (mm)
c = 摇摆频率 Frequency (次数/分) θ
= 摇摆角度 Oscillating angle

往复运动 Reciprocating motion

$$V = \frac{2sc}{60} \quad (\text{m/s})$$

s = 行程长度 (mm)
c = 往复频率 Frequency (次数/分)

PV 值计算 $PV = PXV \quad (\text{N/mm}^2 \times \text{m/s})$

PV 是指轴承在一定的承载和线速度条件下的乘积之和。设备的 PV 值与轴承的使用寿命成反比关系，因此建议设计时设备的 PV 取值尽量使用比较低的安全 PV 值，以确保轴承会有更长的使用寿命。同时也要考虑设备上轴承实际的承载、线速度、使用温度等不能超过所选择材料的极限值，并尽可能地小。

PV is the product of the specific bearing load P and the sliding speed V which is very important design data. We recommend design lower PV value will lead to longer service life. Also don't exceed the max. Of material load, speed, temp. And lower if possible.

滑动轴承与座孔的装配 The Installation of The Sliding Bushing And The Housing

◎SF 系列轴承在装配前宜先用煤油或柴油清洗干净，然后在机油内浸油、沥干。轴承与座孔装配时，即要保证轴承在座孔中不发生转动和轴向移动，要使轴承外表面与座孔充分接触，一般应保证接触面积大于 70% 以上，以利于承受载荷和传导摩擦热，SF 系列轴承内表面是自润滑塑料，外表面是铜背，钢对钢的摩擦系数比钢对塑料的摩擦系数大，因此采用较紧配合，既保证使用时衬套不会在座孔内发生相对移动，又不会使衬套外径过大致使衬套内孔变形较大。

◎对于工作压力较高的场合为避免轴套走外圆，推荐用以下二方法：

1、加大轴套外径尺寸，内孔变形用较正棒校正。

2、安装时，座孔涂 ZY801 厌氧胶，增强轴套与座孔的结合强度。

◎对于外 < 55mm 的轴承可按图 A 所示，利用一个带有手柄的压头轴芯，小心操作，轻轻压力座孔中。

◎当轴承外径 > 55mm 时可按图 B 所示，利用带台肩的手柄以及一个“O”形圈和一个辅助圈小心操作，将轴承压入座孔中。

◎The Installation of SF Bush

◎SF bushes should be cleaned in kerosene or diesel oil first, immersed in engine oil and then dried up. When the bush is installed into housing, make sure the bush not rotating in the housing or moving in the axial direction and at the same time make the outer surface surface fully contact to the base hole, generally

guarantee the contact area over 70%, thus to improve load capacity and transmission of friction heat. The inner surface of SF bush is made of self-lubricating plastic, the outer surface steel backing, The friction coefficient of steel to steel is bigger than that of steel to plastic, So we should choose the light-graded tight fit, preventing the axle sleeve from moving in the base when working, and also preventing the inner holes from getting deformed and too big because of the large tight fit of the outer diameter.


◎Out circle of the axle sleeve should be avoided in the high-pressure working conditions. Two methods are recommended here:

1. Increase the outer diameter of the axle sleeve, and the deformation of inner holes can be calibrated with calibrating core stick.

2. When installing, apply ZY 801 Oxygen-hatred glue in the housing to streng then the combination strength between the axle sleeve and base hole.


◎For bush (outer diameter < 55mm), press the bush into the housing gently and carefully using an core axle with a handle. Fig A.

◎For bush (outer diameter > 55mm), press the bush into the housing gently and carefully using a handle with a shoulder, an “O” ring and an assisting circle. Fig B.





(图A a)平面式安装
(Fig A a)Plane Installation

- 1、压入芯轴
- 2、轴承座孔倒角 $0.8 \times 15^\circ$
- 3、轴承座
- 4、JS-F 轴承
- 5、嵌入肩直径
- R、芯轴端圆角半径



(b)嵌入式安装
(B)Inset Installation

- 1、Press the core axle into bushing
- 2、Housing chamfer at end: $0.8 \times 15^\circ$
- 3、Housing
- 4、JS-F bush
- 5、Diameter of inset shoulder
- R、Radius of the round angle of the core axle end




d2	dH
>55到100	d2 +0.25 d2 +0.25
>100到200	d2 +0.40 d2 +0.35
>200到300	d2 +0.50 d2 +0.40



**JINTAI
BEARING**

SENDOO DESIGN
13957330053 滑动平面设计

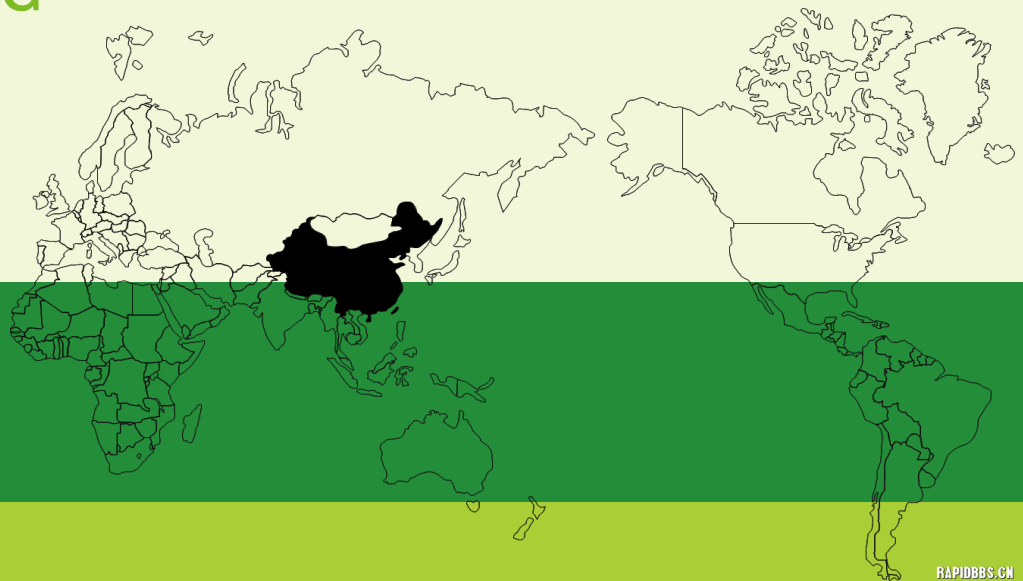

RAPIDBBS.CN



湖南锦泰五金机电有限公司

Hunan Jintai Hardware and Machinery Co., LTD

地址:中国湖南省长沙市芙蓉区锦泰广场

湖南国际商务中心 503

电话: 86-731-84770165

传真: 86-731-84770163

官网: <http://www.slide-bearing.com>

邮箱: sales@slide-bearing.com

Add: No.503,HunanInternational Commerce Center,
Jintai Square,Changsha,410001,Hunan,China.

Tel: 86-731-84770165

Fax: 86-731-84770163

Website:<http://www.slide-bearing.com>

E-mail: sales@slide-bearing.com